



HDMI 2.0 ACTIVE OPTICAL CABLE, HDFC-200P

HDMI 2.0 active optical cable, HDFC-200P, enables to transmit 4K (4096x2160) at 60Hz signal up to 100m (328feet) over plenum graded & LSZH hybrid cable. It avoids any scaling or data compression for lessening a burden of data transmission.

HDFC-200P is designed compact enough to be fitted into various installation environments with cutting edge technology performance. It gives slim, light, easy installation like a general copper HDMI cable. It can be operated by DDC 5V from HDMI port of HDMI source without any external DC power or USB power.

HDFC-200P is compliant with HDMI standards features like CEC, EDID, and HDCP 2.2 for better installation flexibility and compatibility. It also supports HDR to deliver more realistic, and objective video signal.

Specification

- Extends up to 4K (4096x2160) at 60Hz, (RGB & YCbCr : 4:4:4)
- Transmits HDMI 2.0 data up to 100m (328feet) over hybrid cable
- Adopts plenum graded & LSZH (Low Smoke Zero Halogen) hybrid cable
- Operated by HDMI source without external power
- Supports 3D contents transmission
- Supports HDMI2.0 standards feature
- Complies with CEC, EDID, and HDCP 2.2
- Supports HDR at 10 bit or 12 bit speeds respectively within its maximum bandwidth, 18Gbps

Applications

- Home AV
- Digital Signage
- Control room
- Conference room
- Rental staging

Vertrieb durch / Distribution by

HY-LINE[®]

COMPUTER COMPONENTS

Inselkammerstr. 10

D-82008 Unterhaching

Tel.: +49 89 614 503 40


www.hy-line.de

HDMI 2.0 ACTIVE OPTICAL CABLE, HDFC-200P

Technical Features


Resolution	Up to 4K(4096x2160) at 60Hz
Bit rate	Up to 6.0 Gbps/ch
Maximum distance	Up to 100m (328feet) @4K 60Hz
Cable	Plenum graded & LSZH hybrid cable (optical fiber + copper cable)
Power supplying	HDMI Source
LED Indicators	TX / RX power
Power consumption	< 0.45W
Operating temperature	0°C to 50°C
Size (LWH)	42.6 x 19.6 x 11.5 mm

Dimension [mm]

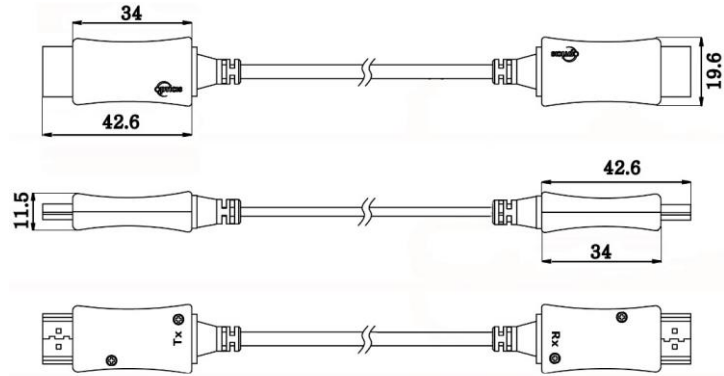

Connection Diagram

4K (4096x2160) @60Hz up to 100m

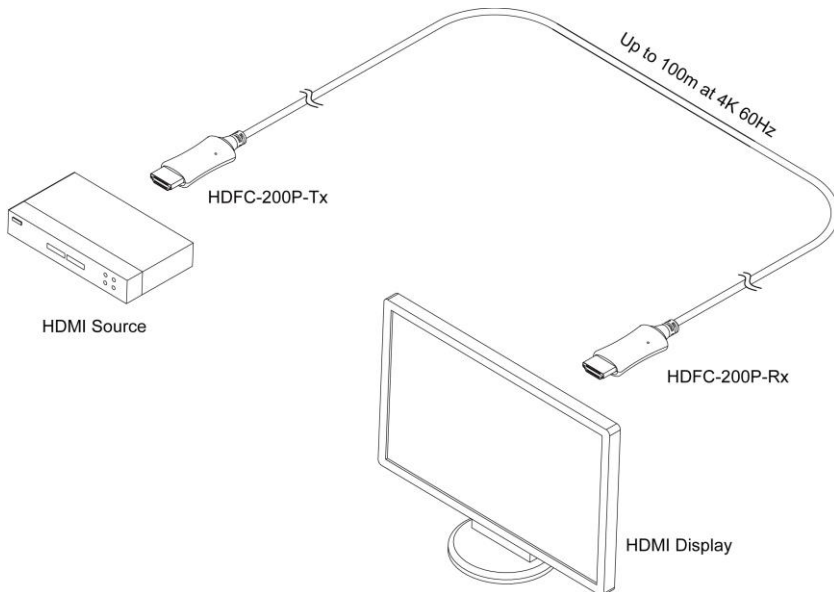

Example: Media player and HDMI Display Set-up

TX: Media player, PC or laptop

RX: Monitor, TV and Projector that has USB input



Opticis Co., Ltd.

7F, 166, Jeongjail-ro, Bundang-gu
Sungnam-si, Gyunggi-do, 13558 South Korea
Tel: +82 (31) 719-8033
Fax: +82 (31) 719-8032

tosales@opticis.com



All contents are subject to be changed without prior notice.