


### Description

- 125°C maximum total temperature operation
- Low profile surface mount inductors
- 10.3mm x 10.5mm x 3.0mm shielded drum core
- Ferrite core material
- Inductance range from 1.1µH to 150µH
- Current range from 9.5 Amperes to 0.68 Amperes
- Frequency range up to 1MHz

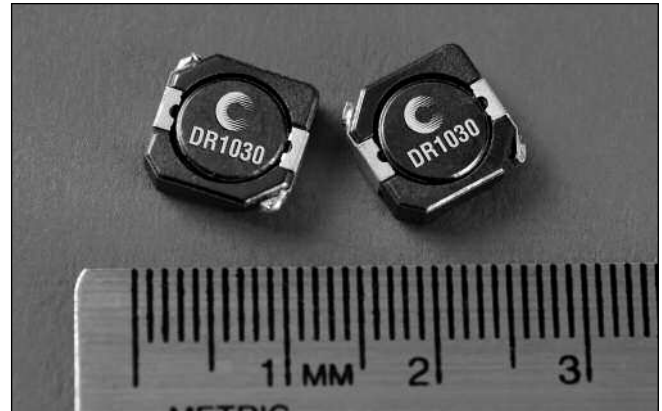

### Applications

- Computer, DVD players, and portable power devices
- Notebook power, LCD panels
- DC-DC converters
- Input/output filter, Buck/Boost regulators

### Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds maximum

### Packaging

- Supplied in tape and reel packaging, 1000 parts per reel

Part Number	Rated Inductance (µH)	OCL (1) µH ± 30%	I <sub>rms</sub> (2) Amperes	I <sub>sat</sub> (3) Amperes	DCR mΩ@20°C (Typical)	DCR mΩ@20°C (Maximum)	K-factor (4)
DR1030-1R1-R	1.1	1.1	7.0	9.50	6.5	7.9	22
DR1030-1R8-R	1.8	1.9	5.9	7.41	9.1	11.0	17
DR1030-2R8-R	2.8	2.8	5.1	6.08	12.1	14.5	14
DR1030-3R9-R	3.9	4.0	4.3	5.13	16.4	20.0	12
DR1030-5R2-R	5.2	5.2	3.7	4.75	22.9	27.5	10
DR1030-6R8-R	6.8	6.8	3.5	3.90	24.9	30.0	9.0
DR1030-8R2-R	8.2	8.4	3.3	3.54	28.4	34.1	8.0
DR1030-100-R	10	10.4	2.8	3.18	40.2	48.0	7.0
DR1030-150-R	15	14.8	2.3	2.66	57.3	68.8	6.0
DR1030-220-R	22	22.8	1.8	2.19	95.5	114.6	4.5
DR1030-330-R	33	32.4	1.6	1.81	113.6	136.3	4
DR1030-470-R	47	47.9	1.3	1.52	166.6	200.0	3.4
DR1030-680-R	68	66.6	1.1	1.24	253.1	303.7	2.9
DR1030-820-R	82	82.4	1.0	1.14	332.4	382.3	2.6
DR1030-101-R	100	100	0.86	1.05	375.0	450.0	2.4
DR1030-121-R	120	119.3	0.8	0.95	523.4	602.0	1.9
DR1030-151-R	150	155.3	0.68	0.86	590.0	700	1.4

(1) Open Circuit Inductance Test Parameters: 100kHz, 0.1V, 0.0Adc.

(2) I<sub>rms</sub>: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.

(3) I<sub>sat</sub> Amperes peak for approximately 35% rolloff max. (@25°C)

(4) K-factor: Used to determine B p-p for core loss (see graph).  
 $B \text{ p-p} = K \cdot L \cdot \Delta I$ , B p-p(mT), K: (K factor from table), L: (Inductance in µH), ΔI (Peak to peak ripple current in Amperes).


(5) Part Number definition: DR1030-xxx-R  
 DR1030 = Product code and size, xxx = Inductance value in µH, R = decimal point. If no R is present third character = # of zeros. -R suffix = RoHS compliant

Ihr Vertriebspartner:  
**HY-LINE**<sup>®</sup>  
 POWER COMPONENTS

Inselkammerstraße 10  
 D-82008 Unterhaching  
 Tel.: +49 (0)89 614503 10  
 Fax: +49 (0)89 614503 20  
 E-Mail: power@hy-line.de  
 URL: www.hy-line.de

Gründenstraße 10  
 CH-8247 Flurlingen  
 Tel.: +41 (0)52 647 42 00  
 Fax: +41 (0)52 647 42 01  
 E-Mail: power@hy-line.ch  
 URL: www.hy-line.ch


### Mechanical Diagrams

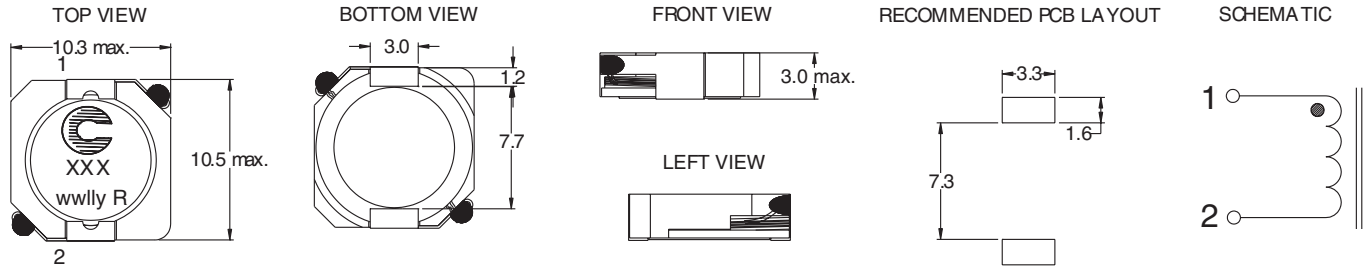


Dimensions are in millimeters.

XXX = Inductance in  $\mu\text{H}$ . R = decimal point. If no R is present third character = # of zeros.  
wwly = Date Code. R = Revision Level.


### Packaging Information

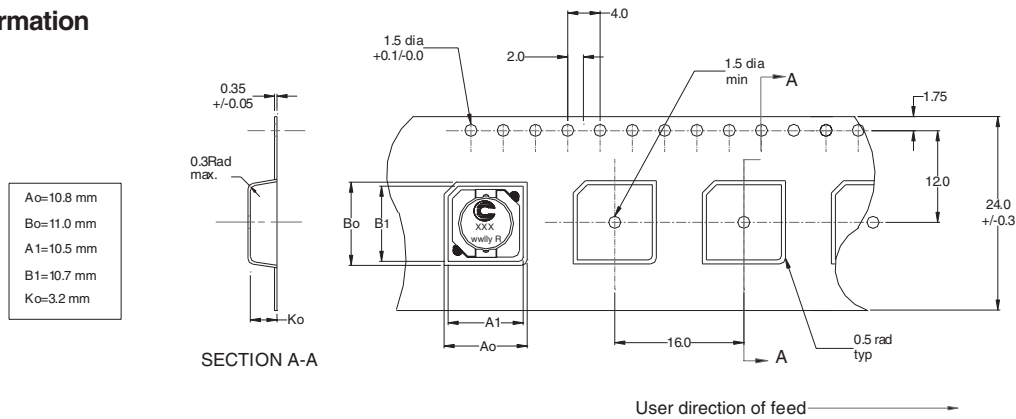

### Core Loss

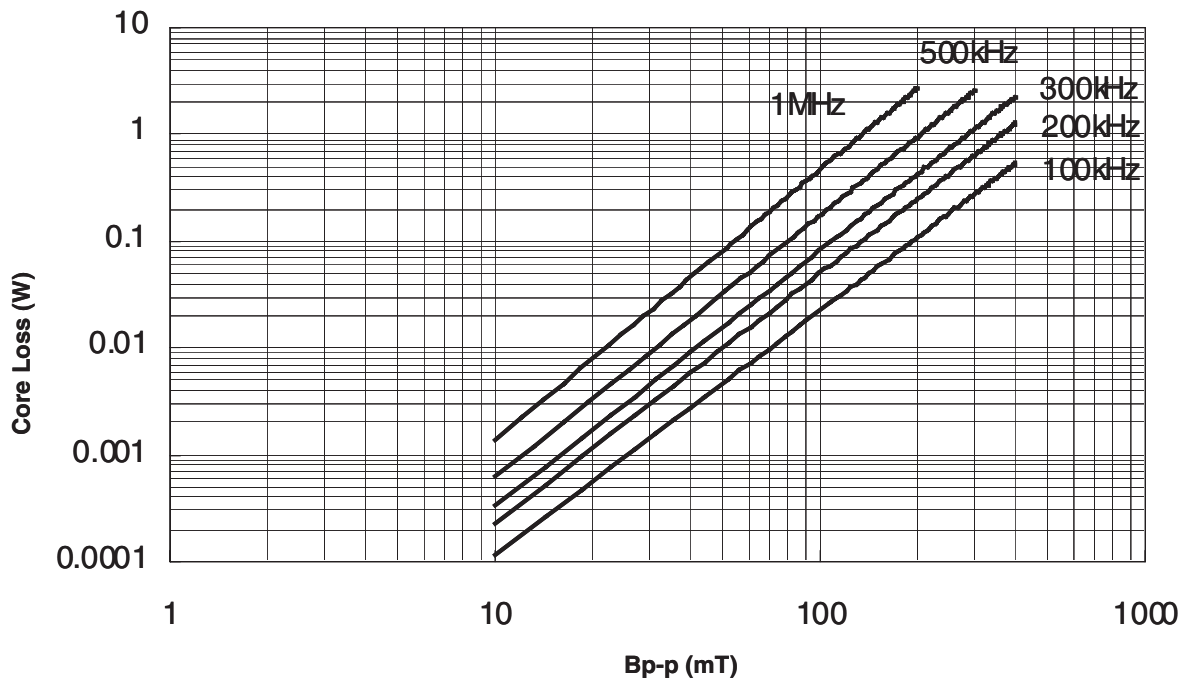

**Temperature Rise vs. Total Loss**

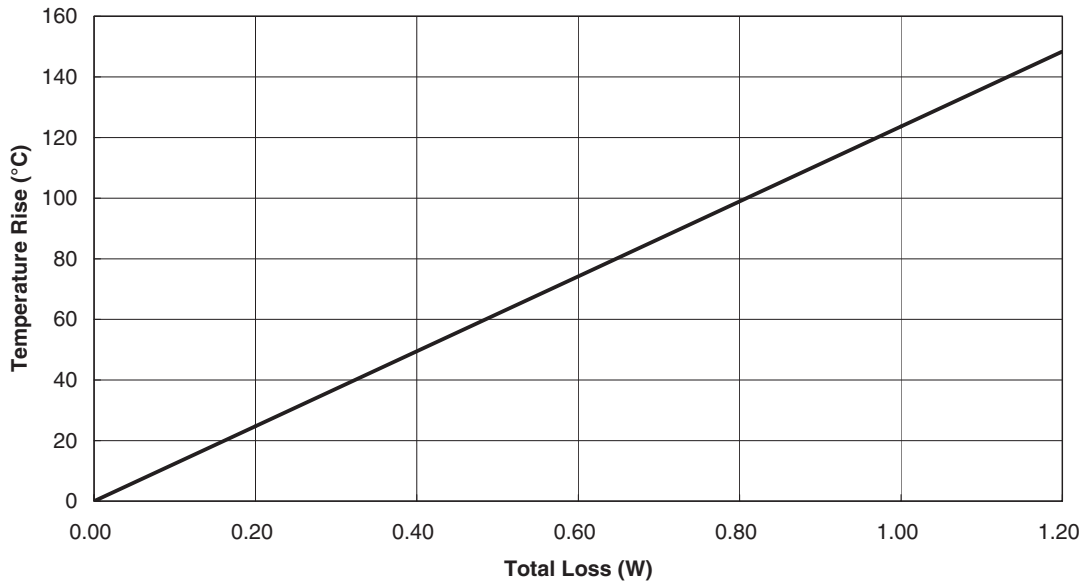

**Inductance Characteristics**

**OCL vs. ISAT**

