




PHI-CON

10 W AC-DC Power Supply PAC10GxxCS-Series

- 85 ... 305 V_{AC} / 70 ... 430 V_{DC} universal input range
- Continuously short circuit and over current protected
- Output short circuit and over current protection
- EN 62368-1, IEC 62368-1 and UL 62368-1
- Designed to meet EN-, IEC 60335-1 and EN-, IEC 61558-1
- Very small outlines

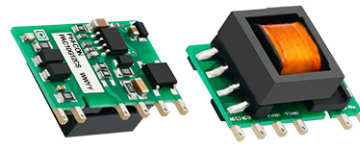

Model guide

Type	Output voltage [V _{DC}]	Output current [mA] max.	Output Power [W]	Efficiency typ. @ full load, Vin 230 V _{AC} [%] typ.	Capacitive load [μF] max.
PAC10G03CS	3.3	2000	6.6	70	1500
PAC10G05CS	5.0	2000	10	77	1500
PAC10G09CS	9.0	1100	10	80	1000
PAC10G12CS	12	830	10	83	680
PAC10G15CS	15	670	10	83	470
PAC10G24CS	24	420	10	84	330

Specifications


Input	
Voltage range	85...305 V _{AC} or 70...430 V _{DC} Power derating see diagram
Frequency	47...63 Hz
Full load input current	≤ 300 mA @ 115 V _{AC} ≤ 150 mA @ 230 V _{AC}
No load power consumption	≤ 0.15 W
Inrush current	15 A @ 115 V _{AC} typ. 30 A @ 230 V _{AC} typ.
Recommended fuse	1 A, time delayed type
Hold up time	≥ 150 ms @ 230 V _{AC}
Isolation	
Isolation voltage (input to output)	3600 V _{AC} test 1 minute at < 5 mA 5000 V _{DC} test 1 minute
Safety	Class II
Output	
Voltage tolerance	≤ ± 5 % at 10...100 % load
Line regulation	≤ ± 1.5 %, @ 100 % load
Minimum load	10 %
Load regulation	± 3 %, typ. @ 10 ... 100 % load
Ripple & noise BW 20 MHz	≤ 150 mVp-p, (see Figure A)
Temperature coefficient	0.2 % / °C, typ.
Protection	
Short circuit	Continuous, auto recovery
Over current protection	≥ 110 % of full load
Over temperature	No
General	
Safety standard	EN-, IEC-, UL 62368-1
Designed to meet the standards	EN-, IEC 61558-1 & 60335-1
Reliability MTBF (MIL-HDBK-217 @ 25 °C)	≥ 1 Mio. h
Switching frequency	65 kHz, typ.

EMC		
CE	EN 55032, CISPR 32)	Class A (see Figure 1&4)
	EN 55032, CISPR 32)	Class B (see Figure 2&3)
RE	EN 55032, CISPR 32)	Class A (see Figure 1&4)
	EN 55032, CISPR 32)	Class B (see Figure 2&3)
ESD	EN-, IEC 61000-4-2	Contact ± 6 kV perf. criteria B
RS	EN-, IEC 61000-4-3	10 V/m perf. criteria A
EFT	EN-, IEC 61000-4-4	± 2 kV perf. criteria B
		± 4 kV perf. criteria B (see Figure 3&4)
Surge	EN-, IEC 61000-4-5	Line to line ± 1 kV perf. criteria B (see Figure 1&2)
		Line to line ± 2 kV perf. criteria B (see Figure 3&4)
CS	EN-, IEC 61000-4-6	10 Vrms perf. criteria A
Voltage dips, short interruption and voltage variation		0%, 70% perf. criteria B
EN-, IEC 61000-4-11		
Environmental		
Operating ambient temperature		-40 ... 85 °C see derating diagram
Storage temperature		-40 ... 105 °C
Storage humidity		≤ 95 %
Cooling		Free air convection, ≥ 35 LFM
Physical		
Dimensions		28.9 x 17.2 x 14 mm
Weight		8.2 g
PCB material		UL94V-0
Mounting		On PCB
Soldering temperature		Wave: ≤ 265 °C, duration ≤ 10 s Manual: ≤ 370 °C, duration ≤ 5 s

Note:


1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta 25 °C, humidity < 75 %, nominal input voltage (115 V_{AC} and 230 V_{AC}) and rated output current.
2. The product is able to work with 0 % ... 10 % load and with stable output.
3. The nominal output voltage refers to the voltage applied to the load terminal after adding external circuits.
4. If the product is used in a severe vibration application, it needs to be glued and fixed.
5. This part is open frame, at least 6.4 mm creepage distance between the primary and secondary external components of the module is needed to meet the safety requirement, refer to the recommended welding hole design in the external dimension drawing;

Figure A The "parallel cable" method is used for ripple and noise test, please refer to AC/DC Converter

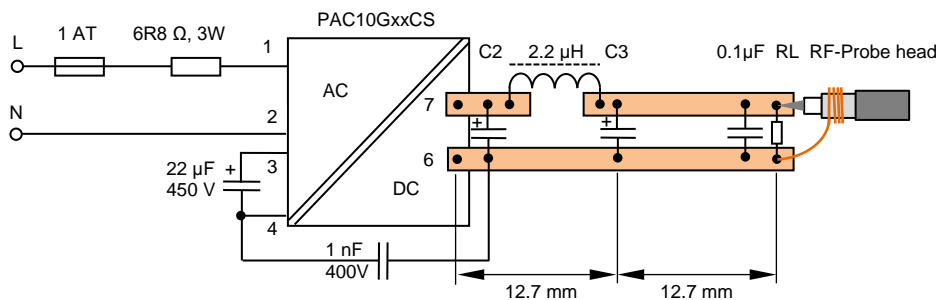

10 W AC-DC Power Supply PAC10GxxCS-Series


Figure 1 Basic application, T_a -40...85 °C, Immunity Class III, Emission Class A

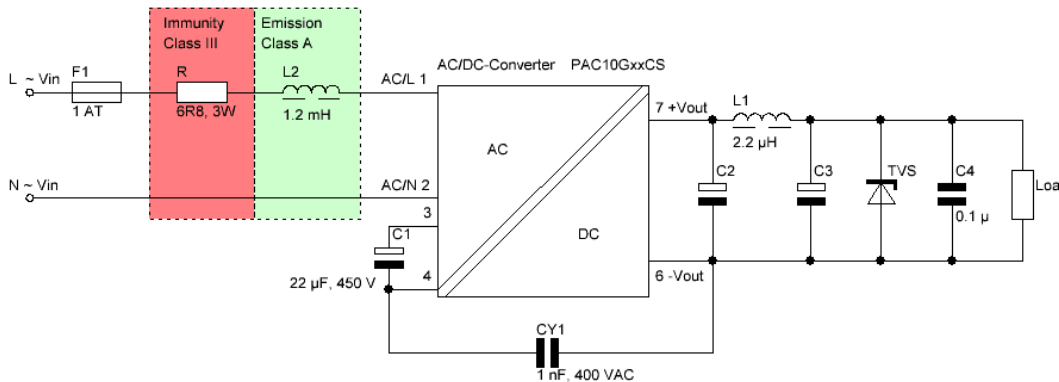

Recommended component table for Figure 1

Type	R	L2	C2	L1	C3	TVS
PAC10G03CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	1500 μF, 6.3 V	2.2 μH, 15 mΩ, 6.5 A	330 μF, 35 V	SMBJ7.0A
PAC10G05CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	820 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	330 μF, 35 V	SMBJ7.0A
PAC10G09CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	470 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	150 μF, 35 V	SMBJ12A
PAC10G12CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	470 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	150 μF, 35 V	SMBJ20A
PAC10G15CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	470 μF, 35 V	2.2 μH, 15 mΩ, 6.5 A	220 μF, 35 V	SMBJ20A
PAC10G24CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	470 μF, 35 V	2.2 μH, 15 mΩ, 6.5 A	47 μF, 50 V	SMBJ30A

Figure 2 Indoor civil an general environment application for smart home (2Y), home appliances, intelligent building and agriculture, T_a -25...55 °C, Immunity Class III, Emission Class B

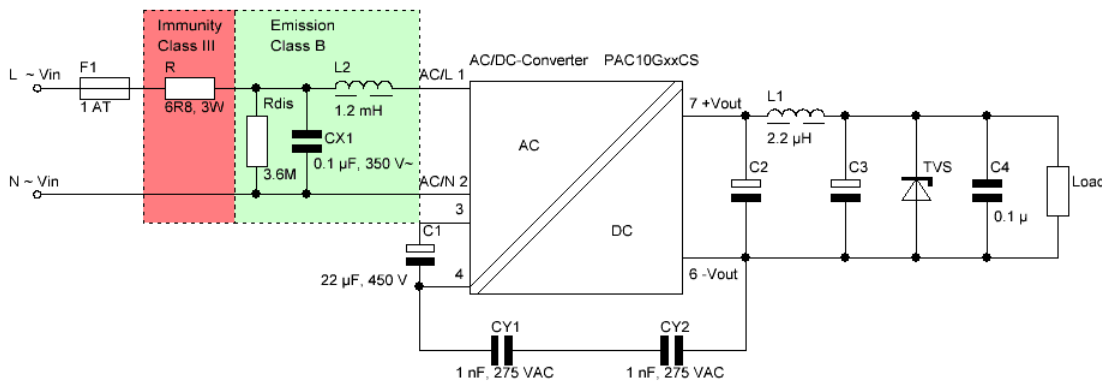

Recommended component table for Figure 2


Type	R	L2	C2	L1	C3	TVS
PAC10G03CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	1500 μF, 6.3 V	2.2 μH, 15 mΩ, 6.5 A	330 μF, 35 V	SMBJ7.0A
PAC10G05CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	820 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	330 μF, 35 V	SMBJ7.0A
PAC10G09CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	470 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	150 μF, 35 V	SMBJ12A
PAC10G12CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	470 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	150 μF, 35 V	SMBJ20A
PAC10G15CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	470 μF, 35 V	2.2 μH, 15 mΩ, 6.5 A	220 μF, 35 V	SMBJ20A
PAC10G24CS	6.8 Ω, 3W, wire wound	1.2 mH, $\leq 2.5 \Omega$, ≥ 0.35 A	470 μF, 35 V	2.2 μH, 15 mΩ, 6.5 A	47 μF, 50 V	SMBJ30A

Note

1. In the home appliance application environment, the two Y capacitors of the primary and secondary need to be externally connected (CY1, CY2 value at 1 nF, 275 VAC), which can meet the EN 60335 standard.
2. According to the certification requirements, the X capacitor needs to be connected in parallel with the bleeder resistance, the recommended resistance value is less than 3.8 MΩ, and the actual need to be selected according to the certification standard.

10 W AC-DC Power Supply PAC10GxxCS-Series


Figure 3 Indoor industrial environment application for manufacturing workshop, Ta -25...55 °C, Immunity Class IV, Emission Class B

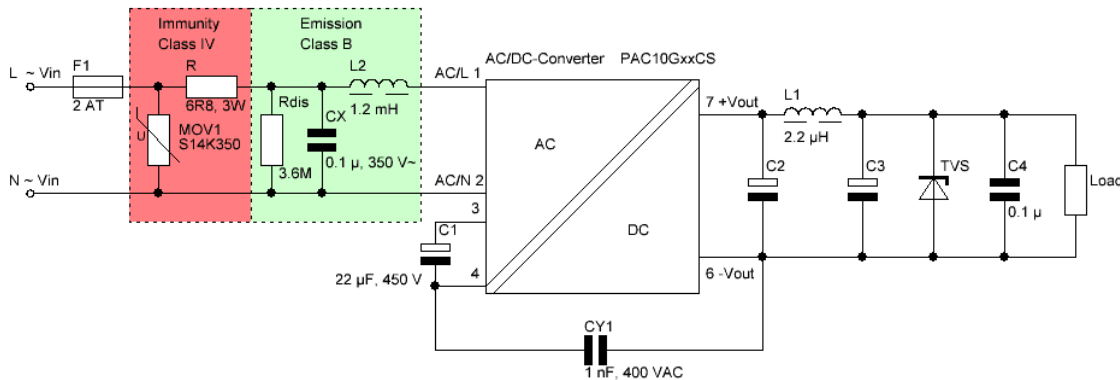

Recommended component table for Figure 3

Type	R	L2	C2	L1	C3	TVS
PAC10G03CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	1500 μF, 6.3 V	2.2 μH, 15 mΩ, 6.5 A	330 μF, 35 V	SMBJ7.0A
PAC10G05CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	820 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	330 μF, 35 V	SMBJ7.0A
PAC10G09CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	470 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	150 μF, 35 V	SMBJ12A
PAC10G12CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	470 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	150 μF, 35 V	SMBJ20A
PAC10G15CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	470 μF, 35 V	2.2 μH, 15 mΩ, 6.5 A	220 μF, 35 V	SMBJ20A
PAC10G24CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	470 μF, 35 V	2.2 μH, 15 mΩ, 6.5 A	47 μF, 50 V	SMBJ30A

Figure 4 Outdoor general environment application for ITS, Video monitoring, Charging point, Communication, Security and protection Ta -40...85 °C, Immunity Class IV, Emission Class A

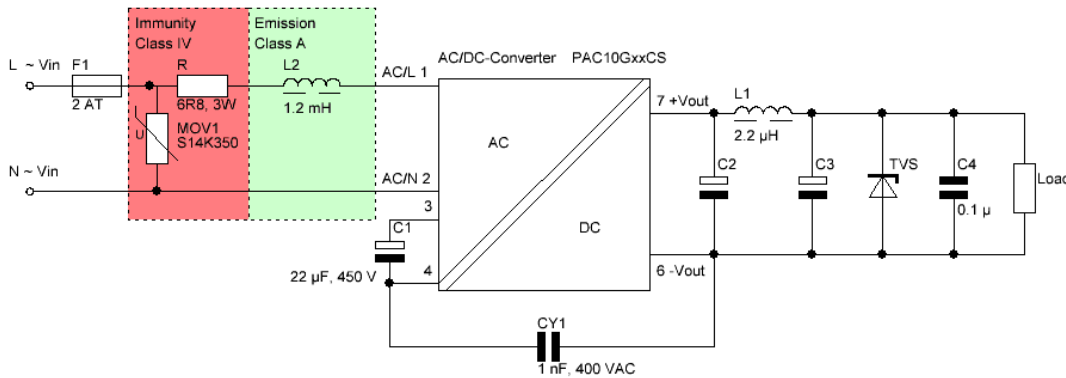

Recommended component table for Figure 4


Type	R	L2	C2	L1	C3	TVS
PAC10G03CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	1500 μF, 6.3 V	2.2 μH, 15 mΩ, 6.5 A	330 μF, 35 V	SMBJ7.0A
PAC10G05CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	820 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	330 μF, 35 V	SMBJ7.0A
PAC10G09CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	470 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	150 μF, 35 V	SMBJ12A
PAC10G12CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	470 μF, 16 V	2.2 μH, 15 mΩ, 6.5 A	150 μF, 35 V	SMBJ20A
PAC10G15CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	470 μF, 35 V	2.2 μH, 15 mΩ, 6.5 A	220 μF, 35 V	SMBJ20A
PAC10G24CS	6.8 Ω, 3W, wire wound	1.2 mH, ≤2.5 Ω, ≥0.35 A	470 μF, 35 V	2.2 μH, 15 mΩ, 6.5 A	47 μF, 50 V	SMBJ30A

10 W AC-DC Power Supply PAC10GxxCS-Series




PHI-CON


PAC10G05CS Efficiency vs output load at 230 VAC

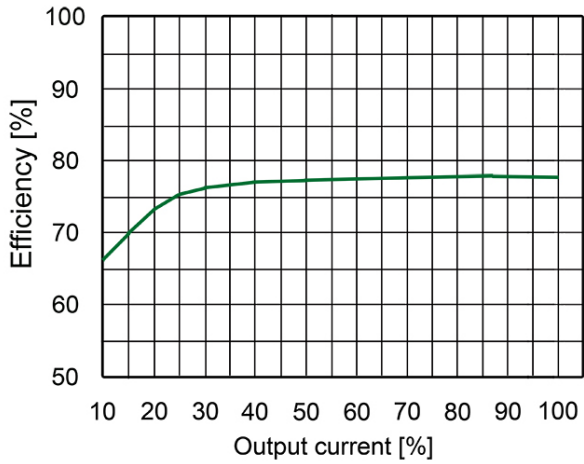


PAC10G05CS Efficiency vs input Voltage at full load

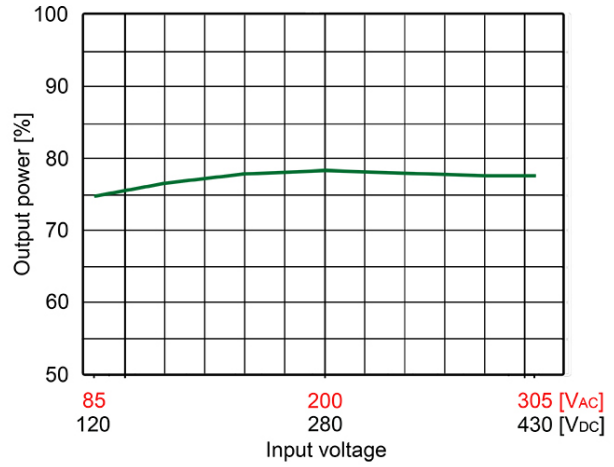


PAC10G12CS Efficiency vs output load at 230 VAC

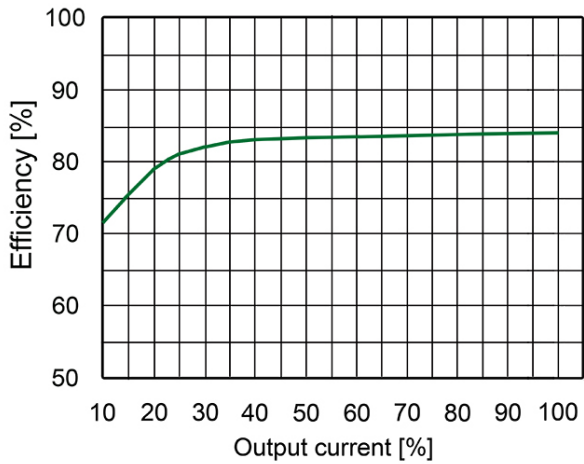


PAC10G12CS Efficiency vs input Voltage at full load

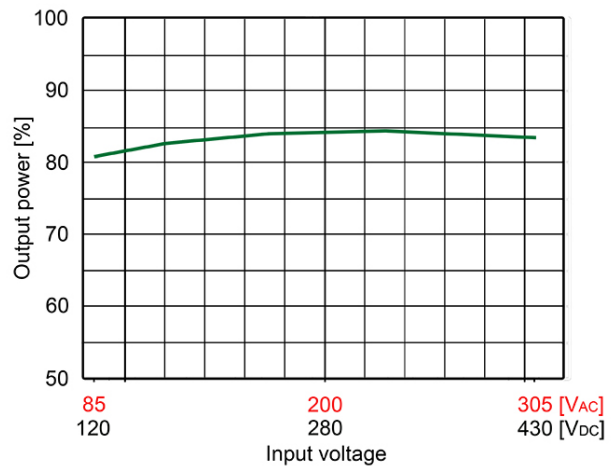

PAC10G24CS Efficiency vs output load at 230 VAC


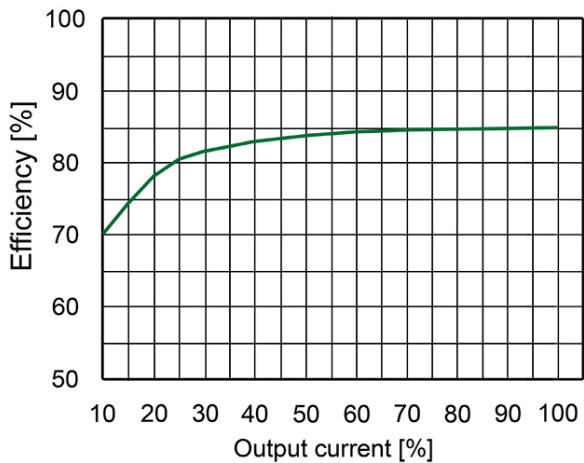


PAC10G24CS Efficiency vs input Voltage at full load

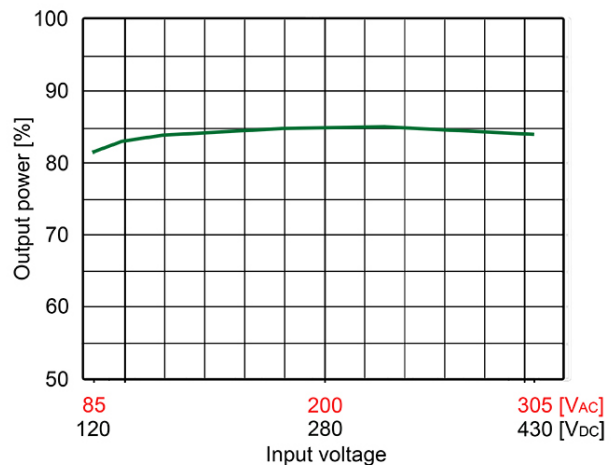

10 W AC-DC Power Supply PAC10GxxCS-Series



Derating diagrams

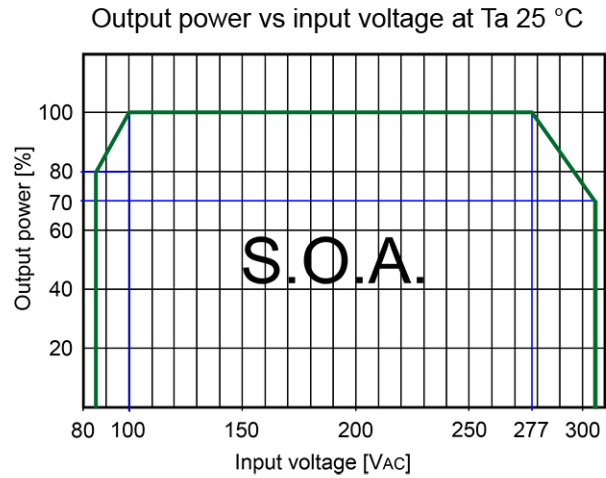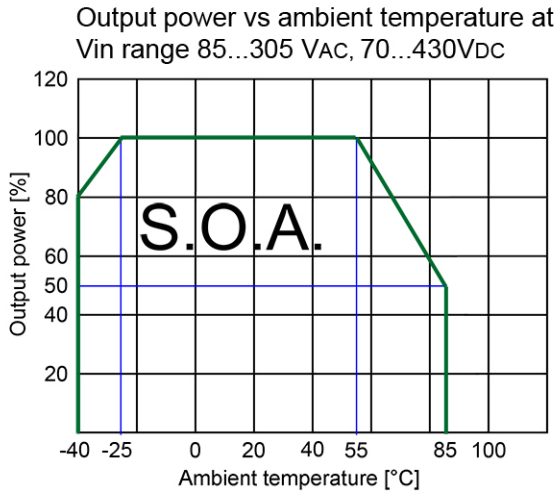

Note:

- With an AC input voltage between 85 ... 100 V_{AC} and 277... 305 V_{AC} and a DC input voltage between 70 ... 120 V_{DC} and 390 ... 430V_{DC}, the output power must be derated as per temperature derating curves.
- This product is suitable for applications using free air cooling ≥ 35 LFM.

Mechanical dimensions

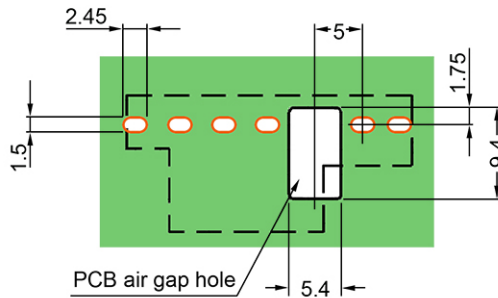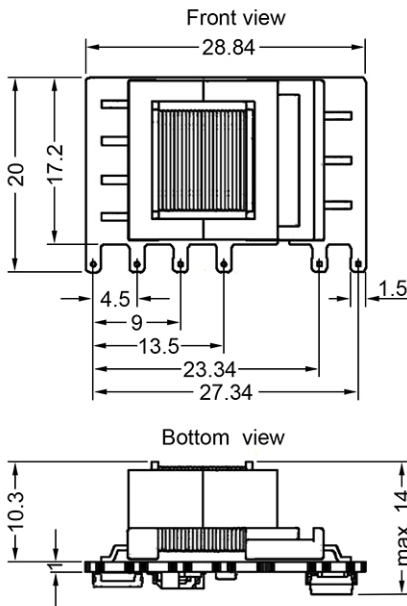

Pin assignment	
1	AC In (L) or +Vin
2	AC In (N) or -Vin
3	+ Capacitor (C1)
4	- Capacitor (C1)
6	- DC Out
7	+ DC Out

Note:
All dimensions in mm
General tolerances ± 1 mm

PHI-CON is a trademark of HY-LINE Holding GmbH.

Only for professional use by professionals! Not for resale or distribution to the general public in any way! Read the instructions for use carefully before using!

Life Support Policy: HY-LINE does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Rev: 20210223 f