



Test



Industrial



Broadcast



Comm


Ihr Vertriebspartner:

HY-LINE
POWER COMPONENTS

Inselkammerstraße 10
D-82008 Unterhaching
Tel: +49 (0)89 614 503 10
Fax +49 (0)89 614 503 20
E-Mail: power@hy-line.de
URL: www.hy-line.de

600W Full Brick DC-DC Converters

Features	Benefits
• Standard Full Brick Footprint	• Second Sourcing
• 36 - 75VDC Input	• Suitable for Telecom
• 9.6 and 12V Nominal Outputs	• For use with POL's
• Up to 94% Efficiency	• Better System Thermal Management

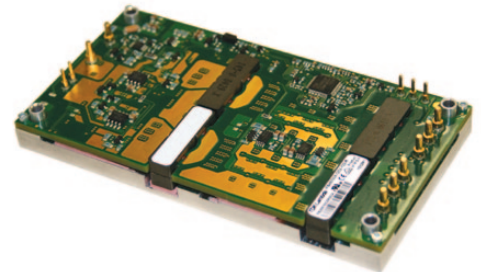


Specification		iFB	
Model		9.6V	12V
Nominal Output Voltage	VDC	9.6V	12V
Input Voltage Range	VDC	36-75	
Input Current	A	18.7A Maximum	
Efficiency (48V input)	%	93% @ 70% load	94% @ 84% load
Output Voltage Adjustment	VDC	5.76 - 10.56	7.2 - 13.2
Output Voltage Accuracy	%	±3%	
Ripple & Noise (max) pk-pk	mV	140	175
Line Regulation (typ)	mV	3	7
Load Regulation (typ)	mV	2	2
Overcurrent Protection (typ)	A	64	60
Overvoltage Protection (typ)	V	11.7	14.8
Remote On/Off	-	Yes	
Remote Sense	-	Yes	
Operating Temperature	°C	-40°C to +125°C	
Storage Temperature	°C	-55°C to +125°C	
Temperature regulation (typ)	mV	40	
Humidity (operating)	%	20-95% RH Non condensing	
Humidity (storage)	%	10-95% RH Non condensing	
Cooling	-	Conduction, convection or forced air	
Isolation Voltage	VDC	Input to baseplate, Input to Output 1500VDC; Output to base plate 500VDC	
Isolation Resistance	Ω	>15MΩ	
Vibration	-	Bellcore TR-EOP-000063, Section 5.4.4	
Shock	-	MIL-STD-202G, Method 213B, Test Condition I	
Safety Agency Certifications	-	UL60950 (US and Canada), VDE0805, CB Scheme (IEC950), CE Mark (EN60950)	
Weight (Typ)	g	225	
Size (WxHxD)	mm	116.84 x 60.96 x 13.21	
Warranty	yrs	3	

Note: See Installation Manual for full details, test methods of parameters and application notes

Model Selector

Input Model	Output Voltage (V)	Max. Voltage (V)	Max. Current (A)	Power (W)	OVP	Pin Length (in)
iFB48058A096V-122-R	36 - 75	9.6	58	557	Latching	0.166
iFB48050A120V-122-R	36 - 75	12	50	600	Latching	0.166

Outline Drawing iFB Series

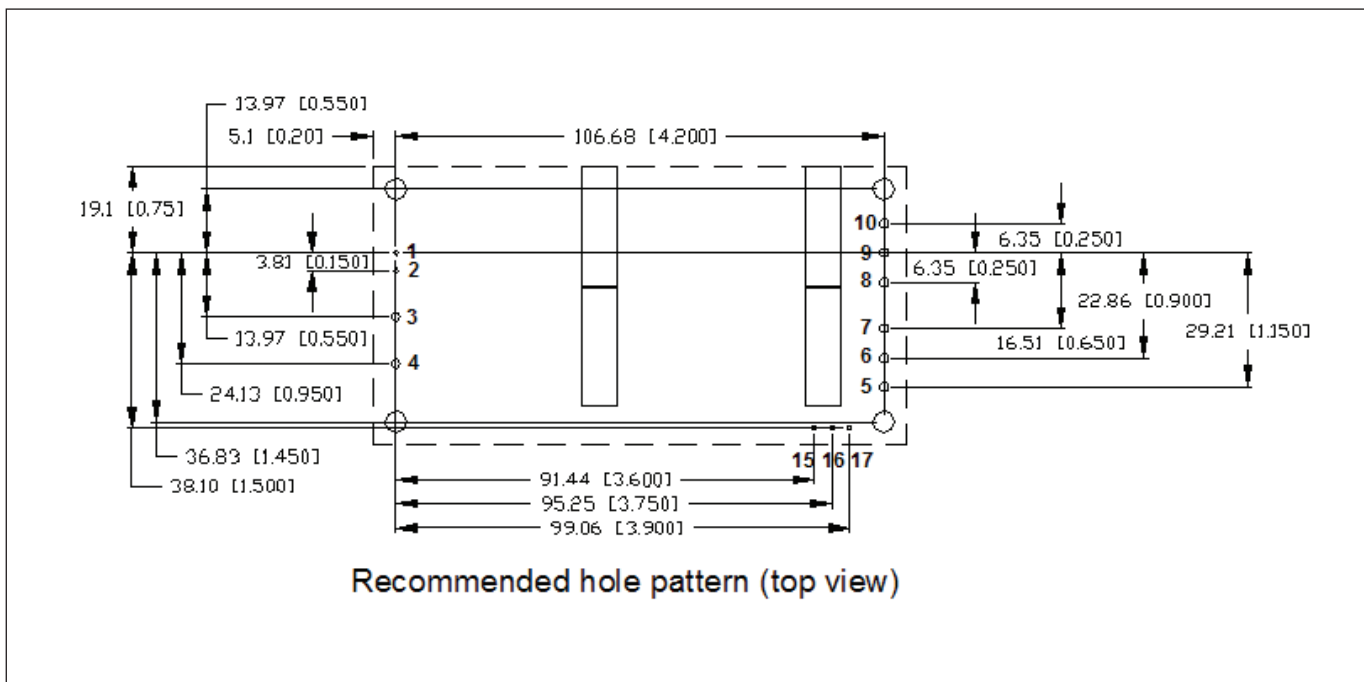

Pinout

PIN	Function	PIN	Function	PIN	Function
1	ON/OFF (+)	7	Vout (-)	13	not available
2	ON/OFF (-)	8	Vout (+)	14	not available
3	Vin (+)	9	Vout (+)	15	TRIM
4	Vin (-)	10	Vout (+)	16	SENSE (+)
5	Vout (-)	11	not available	17	SENSE (-)
6	Vout (-)	12	not available		



TDK-Lambda France SAS

3 Avenue du Canada
Parc Technopolis
Bâtiment Sigma
91940 les Ulis
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@nl.tdk-lambda.com
www.nl.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info@at.tdk-lambda.com
www.de.tdk-lambda.com



Switzerland Sales Office

Bahnhofstrasse 50
8305 Dietlikon
Switzerland
Tel: +41 44 850 53 53
Fax: +41 44 850 53 50
info@ch.tdk-lambda.com
www.de.tdk-lambda.com



Nordic Sales Office

Haderslevvej 36B
DK-6000 Kolding
Denmark
Tel: +45 2911 9556
info@dk.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.

Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



C.I.S.

Commercial Support:
Tel: +7 (495) 665 2627
Technical Support:
Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.tdk-lambda.ru

Local Distribution

Ihr Vertriebspartner:

HY-LINE
POWER COMPONENTS

Inselkammerstraße 10
D-82008 Unterhaching
Tel: +49 (0)89 614 503 10
Fax +49 (0)89 614 503 20
E-Mail: power@hy-line.de
URL: www.hy-line.de