

Description

- 125°C maximum total temperature operation
- Low profile surface mount inductors
- 7.0mm x 7.0mm x 3.0mm shielded drum core
- Ferrite core material
- Inductance range from 3.3µH to 680µH
- Current range from 3.7 Amps to 0.21 Amps
- Frequency range up to 1MHz




Applications

- PDA's, Wireless handsets
- Handheld computers
- MP3 players, CD players, organizers
- Portable computers, GPS receivers
- ADSL/DSL/Cable modems
- Buck and Boost inductor
- Battery power, Li-Ion, 2-cell
- Digital still camera
- White LED driver

Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds maximum

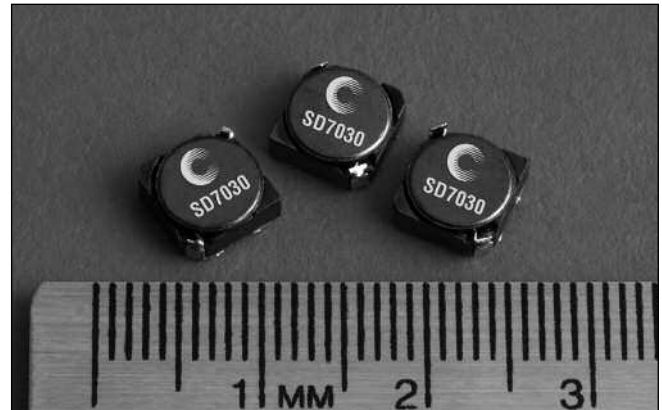

Packaging

- Supplied in tape and reel packaging, 1500 per reel

Ihr Vertriebspartner:
HY-LINE[®]
POWER COMPONENTS

Inselkammerstraße 10 D-82008 Unterhaching Tel.: +49 (0)89 614503 10 Fax: +49 (0)89 614503 20 E-Mail: power@hy-line.de URL: www.hy-line.de	Gründenstraße 10 CH-8247 Flurlingen Tel.: +41 (0)52 647 42 00 Fax: +41 (0)52 647 42 01 E-Mail: power@hy-line.ch URL: www.hy-line.ch
--	--

Part Number	Rated Inductance (µH)	OCL (1) µH ± 30%	I _{rms} (2) Amperes	I _{sat} (3) Amperes	DCR mΩ@25°C (Typical)	DCR mΩ@25°C (Maximum)	K-factor (4)
SD7030-3R3-R	3.3	3.3	3.7	3.00	20	24	22
SD7030-3R9-R	3.9	4.1	3.4	2.60	22	27	19
SD7030-5R0-R	5.0	4.9	3.2	2.40	26	31	17
SD7030-6R0-R	6.0	5.8	2.8	2.25	29	35	16
SD7030-7R3-R	7.3	7.0	2.3	2.10	45	54	13
SD7030-8R0-R	8.0	7.8	2.2	1.85	48	58	12
SD7030-100-R	10	10.0	2.1	1.70	54	65	11
SD7030-120-R	12	11.5	1.9	1.55	58	70	10
SD7030-150-R	15	14.6	1.7	1.40	70	84	9.3
SD7030-180-R	18	17.3	1.7	1.32	79	95	8.8
SD7030-220-R	22	21.0	1.4	1.20	107	128	7.6
SD7030-260-R	26	24.9	1.3	1.05	118	142	6.9
SD7030-300-R	30	30.0	1.2	0.97	138	165	6.4
SD7030-390-R	39	39.7	1.1	0.86	175	210	5.7
SD7030-440-R	44	43.4	1.1	0.80	198	238	5.3
SD7030-560-R	56	54.4	0.99	0.73	231	277	4.9
SD7030-680-R	68	66.6	0.85	0.65	253	304	4.3
SD7030-820-R	82	81.4	0.82	0.60	325	390	4.0
SD7030-101-R	100	95.5	0.70	0.54	446	535	3.6
SD7030-121-R	120	115.2	0.67	0.50	629	755	3.3
SD7030-151-R	150	145	0.57	0.44	715	858	2.9
SD7030-181-R	180	174	0.54	0.40	805	966	2.7
SD7030-221-R	220	211	0.51	0.36	1102	1322	2.4
SD7030-271-R	270	264	0.44	0.33	1259	1475	2.2
SD7030-331-R	330	317	0.38	0.30	1438	1725	2.0
SD7030-391-R	390	381	0.36	0.27	1857	2228	1.8
SD7030-471-R	470	460	0.34	0.25	2150	2581	1.7
SD7030-561-R	560	561.0	0.29	0.23	2857	3428	1.5
SD7030-681-R	680	677.2	0.28	0.21	3206	3847	1.4

(1) Open Circuit Inductance Test Parameters: 100kHz, 0.1V, 0.0Adc.

(2) I_{rms}: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.

(3) I_{sat} Amperes peak for approximately 35% rolloff (@25°C)

(4) K-factor: Used to determine B p-p for core loss (see graph).

B p-p = K²·L·ΔI, B p-p(mT), K: (K factor from table), L: (Inductance in µH), ΔI (Peak to peak ripple current in Amps).


(5) Part Number Definition: SD7030-xxx-R

SD7030 = Product code and size; -xxx = Inductance value in µH;

R = decimal point; If no R is present, third character = # of zeros.

-R suffix = RoHS compliant


Mechanical Diagrams

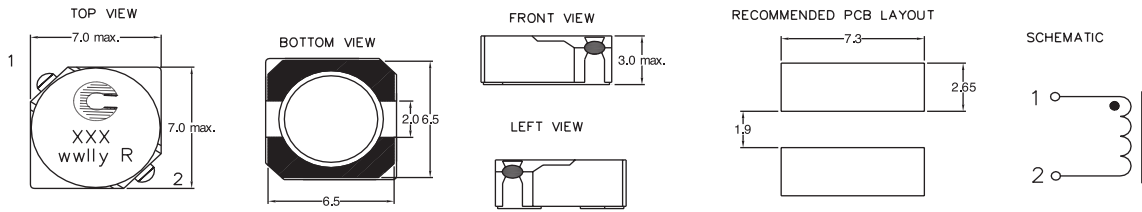

Dimensions are in millimeters.


xxx = Inductance value in uH. R = decimal point. If no R is present third character = # of zeros.
wwly = Date code, R = Revision level.

Packaging Information

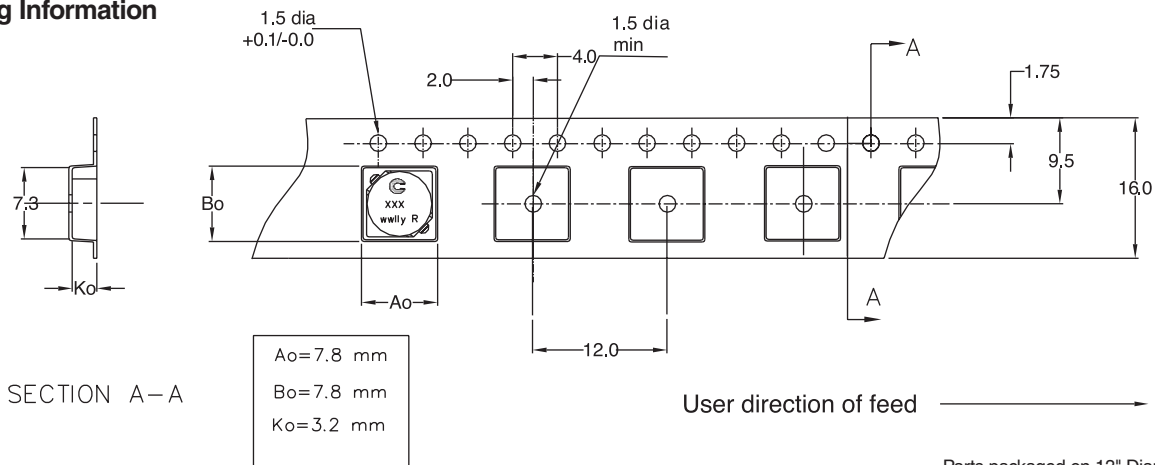


Parts packaged on 13" Diameter reel,
1,500 parts per reel.

Core Loss

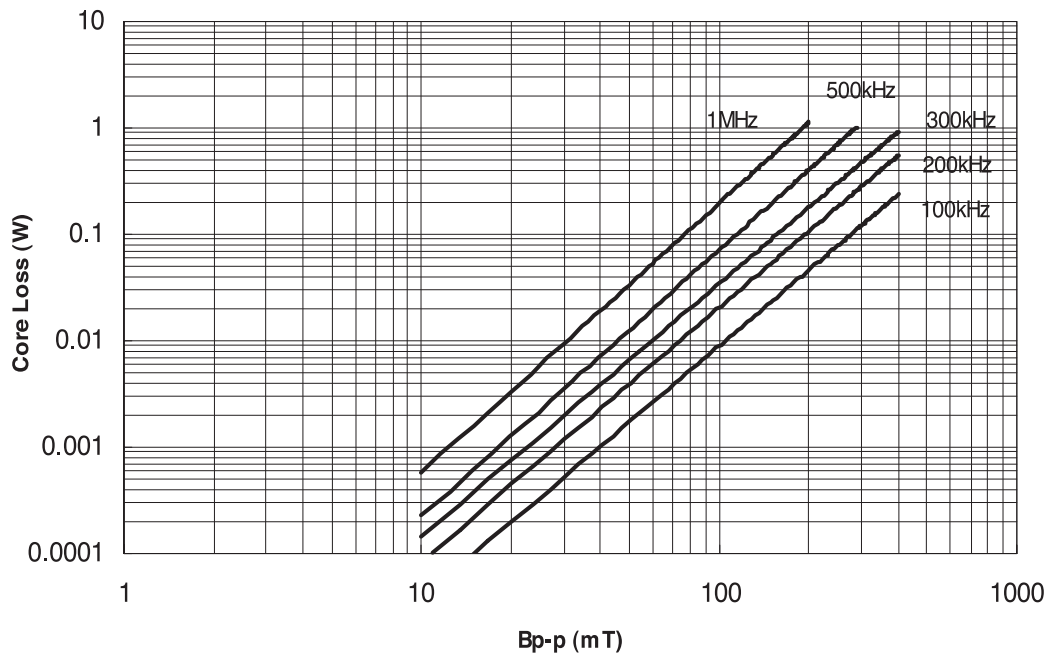

Temperature Rise vs. Loss

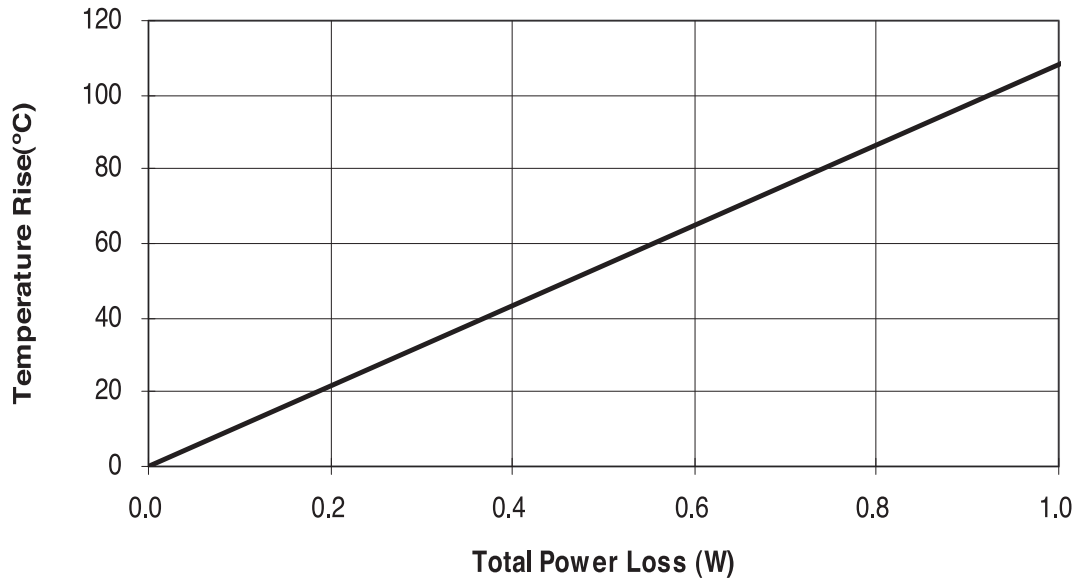

Inductance Characteristics

OCL Vs. Isat

