
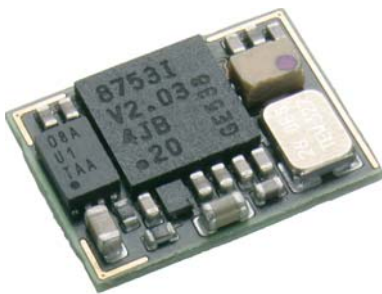


Bluetooth-Module PAN1310



(Module without shielding)

OUTLINES - ENW89809M5A

Now you can integrate Bluetooth very easy in your final product, with the PAN1310-HCI. In the near future we will have also an SPP version.

The PAN1310 is manufactured in a 11,6 x 8,7 x 1.8 mm³ SMD LGA package with shielded case and qualified to the Bluetooth 2.0 standard.

Due to a very low price PAN1310 is well suited for units produced in all quantities, if you are able to integrate an HCI module into your application.

This module follows the national and international regulations, e.g. EMC, Safety, EN300328, FCC.

FEATURES

General

- Complete Bluetooth 2.0 + EDR solution
- Ultra low power design
- Temperature range from -40°C to 85°C
- Integrates ARM7TDMI, RAM and patchable ROM
- On-module voltage regulator. External supply 2.7-3.6V
- Reference clock included
- Low power clock from internal oscillator or external low power clock (e.g. 32.768 kHz)
- Dynamic low power mode switching
- No external components except antenna is needed

Interfaces

- 3.25 Mbaud UART with transport layer detection (HCI UART, HCI Three-Wire UART)
- PCM/I2S interface for digital audio
- WLAN coexistence interface
- General purpose I/Os with interrupt capabilities. JTAG for boundary scan and debug

Bluetooth

- Piconet with seven slaves. Scatternet with two slave roles while still being visible
- SCO and eSCO with hardware accelerated audio signal processing
- Power control and RSSI. Hold, Park and Sniff.
- Adaptive Frequency Hopping, Quality of Service, Channel Quality Driven Data Rate
- Bluetooth security features: Authentication, Pairing and Encryption
- Bluetooth test mode and Infineon's active Bluetooth tester mode

MODULES
WIRELESS
 Panasonic Electronic Devices Europe GmbH



CONTACT

Carsten Pfaff
Head of Product Marketing

HY-LINE Communication Products Vertriebs GmbH
Inselkammerstr. 10
82008 Unterhaching, Germany

Tel: (49)-89 614503-236
Fax: (49)-89 6140960
Mobile: (49)-151 6774046


c-pfaff@hy-line.de

APPLICATIONS

All Wireless Applications

- Printer Adapters
- Printers
- Access Points
- Wireless Sensors
- Industrial Applications
- Cable Replacement
- Personal Digital Assistants (PDAs)
- PC Motherboards & - Peripherals
- Scanners
- Mono & Stereo Audio Applications

BLOCK DIAGRAM

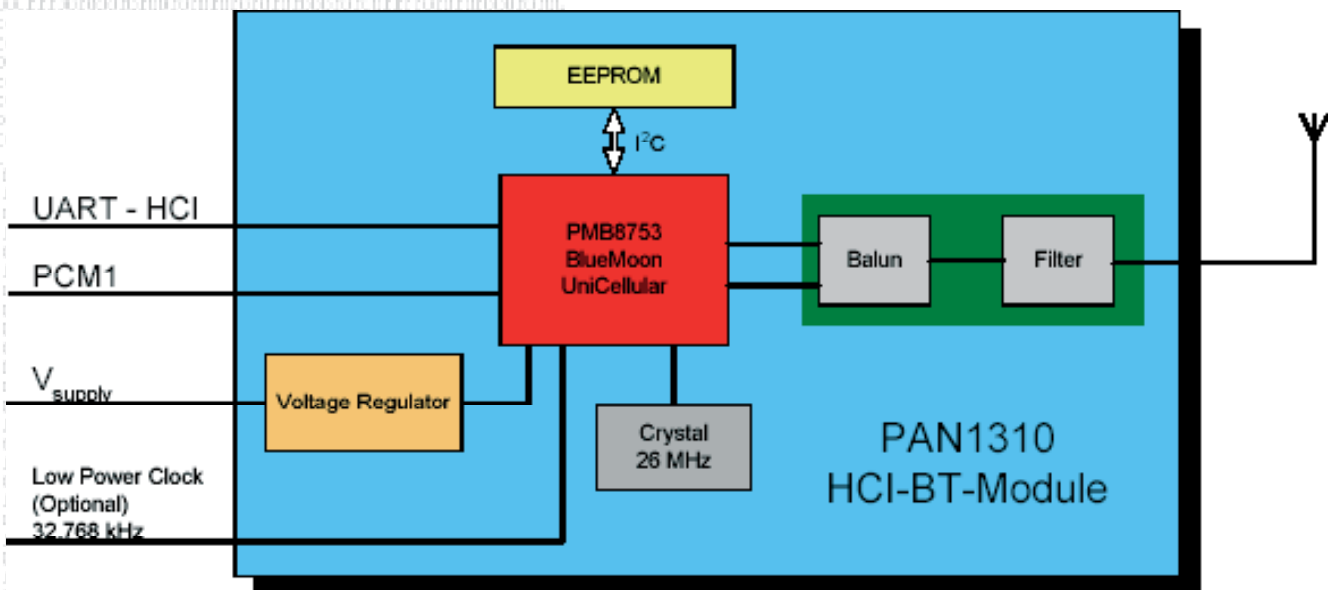

TECHNICAL CHARACTERISTICS

Parameter	Value	Condition / Note
Receiver Sensitivity (BER=10 ⁻³)	-86 dBm	ideal wanted signal
Output Power	3dBm typ.	max. 4 dBm
Power Supply	2,7 - 3,6 V	Single operation voltage
Ultra Low Power Mode	80µA	T = 25°C
ACL (Transmit 3-DH1)	40mA	Enhanced Data Rate, 544.0 kb/s ⁽¹⁾
ACL (Receive 3-DH1)	37mA	Enhanced Data Rate, 544.0 kb/s ⁽¹⁾
Operating Temperature Range	-40°C to +85°C	

(1) Figure indicates maximum possible data rate with this packet type