



**MERIT SENSOR™**

**HY-LINE®**  
S E N S O R - T E C

Inselkammerstr. 10  
82008 Unterhaching  
Tel.: 089/614503-30  
E-Mail: sensortec@hy-line.de

Postfach 1222  
82002 Unterhaching  
Fax: 089/614503-34  
www.hy-line.de

DATA SHEET

**AP301 Series**


The **AP301 Series** is ideal for high-volume, medium-pressure OEM applications.

**COMPANY:** Merit Sensor is a leader in piezoresistive pressure sensing and partners with clients to create high performing solutions for a variety of applications and industries.

**SENTIUM:** Merit Sensor products incorporate a proprietary Sentiium® technology, which was developed to provide a best-in-class operating temperature range (-40°C to 150°C) and superior stability.

**TECHNOLOGY:** Merit Sensor utilizes a piezoresistive Wheatstone bridge in a design that anodically bonds glass to a chemically etched silicon diaphragm. All products are RoHS compliant.

**CAPABILITIES:** Merit Sensor designs, engineers, fabricates, dices, assembles, tests, sells and services die and packaged products from a state-of-the-art facility near Salt Lake City, Utah.

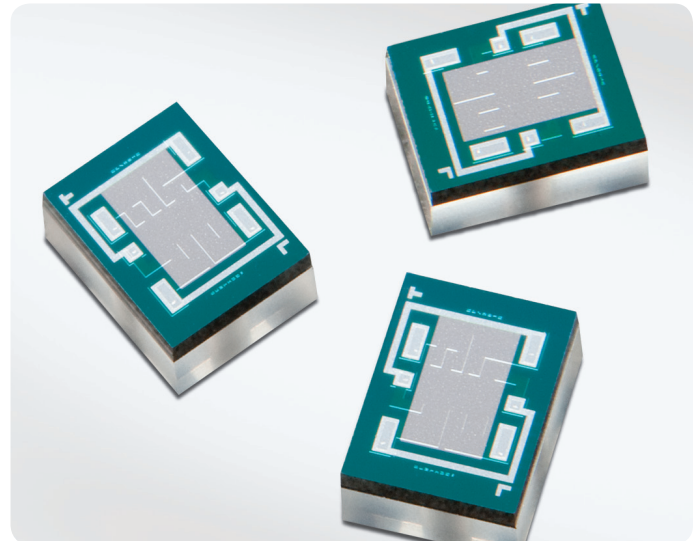


**FEATURES**

<b>Range</b>	100 to 1,000 psi (6.9 to 68.9 bar; 689 to 6,895 KPa)
<b>Type</b>	Absolute, gage, differential and vacuum
<b>Media</b>	Clean, dry air and non-corrosive gases
<b>Shipping</b>	Wafers on tape
<b>Flexibility</b>	Sensitivity, resistance, bridge, constraint, etc.

**BENEFITS**

<b>Performance</b>	Enjoy best-in-class performance due to Merit's proprietary Sentiium technology
<b>Cost</b>	Save money over time with high-performing die
<b>Security</b>	Feel confident doing business with an experienced company backed by a solid parent company (NASDAQ: MMSI)
<b>Speed</b>	Get to market quickly with creative and flexible solutions
<b>Service</b>	Experience prompt, personal and professional support

**AP301 Series Part Number Configurator**

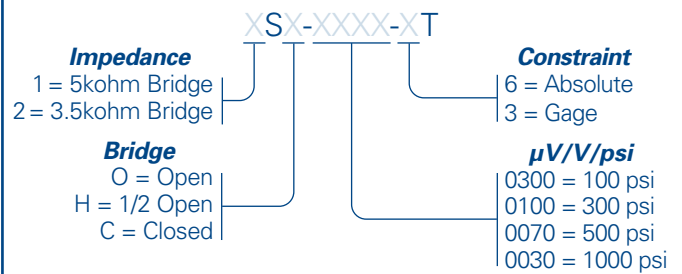

**Example:** 1SO-0300-3T offers 5kohm Impedance, Open Bridge, 100 psi and Gage Constraint

**Note:** "T" in part number = sawn wafer on tape in metal frame


**AP301 Series Standard Part Numbers**

1SO-0300-6T	1SC-0300-6T	2SH-0300-6T
1SO-0100-6T	1SC-0100-6T	2SH-0100-6T
1SO-0070-6T	1SC-0070-6T	2SH-0070-6T
1SO-0030-6T	1SC-0030-6T	2SH-0030-6T
1SO-0300-3T	1SC-0300-3T	2SH-0300-3T
1SO-0100-3T	1SC-0100-3T	2SH-0100-3T
1SO-0070-3T	1SC-0070-3T	2SH-0070-3T
1SO-0030-3T	1SC-0030-3T	2SH-0030-3T
1SH-0300-6T	2SO-0300-6T	2SC-0300-6T
1SH-0100-6T	2SO-0100-6T	2SC-0100-6T
1SH-0070-6T	2SO-0070-6T	2SC-0070-6T
1SH-0030-6T	2SO-0030-6T	2SC-0030-6T
1SH-0300-3T	2SO-0300-3T	2SC-0300-3T
1SH-0100-3T	2SO-0100-3T	2SC-0100-3T
1SH-0070-3T	2SO-0070-3T	2SC-0070-3T
1SH-0030-3T	2SO-0030-3T	2SC-0030-3T


### SPECIFICATIONS

Parameter	Minimum	Typical	Maximum	Units	Notes
<b>Electrical &amp; Environmental</b>					
Excitation		5	15	V	Maximum: 3 mA
Impedance	4000	5000	6000	Ω	Optional: 3,500 +/- 500
Operating Temperature	-40		150	°C	Sentium® technology
Storage Temperature	-55		160	°C	
<b>Performance</b>					
Offset	-10	0	10	mV/V	Zero pressure; gage only; @25°C
Non-linearity	-0.15	0	0.15	% FSO	Best Fit Straight Line; @25°C
Pressure Hysteresis	-0.05	0	0.05	% FSO	@25°C
Temp Coeff – Zero	-25	0	25	μV/V/°C	-40°C to 150°C
Temp Coeff – Resistance	2300	2800	3300	PPM/°C	-40°C to 150°C
Temp Coeff – Sensitivity	-1500	-2200	-2500	PPM/°C	-40°C to 150°C
Thermal Hysteresis	-0.1	0	0.1	% FSO	Zero pressure
Long-Term Stability	-0.1	0	0.1	% FSO	
Burst Pressure	3X				Full scale pressure
<b>Full-Scale Output (@ 5 volts)</b>					
100 psi (6.9 bar; 689 KPa)	125	150	175	mV	Other outputs available upon request
300 psi (20.7 bar; 2,068 KPa)	120	150	180	mV	
500 psi (34.5 bar; 3,447 KPa)	150	175	200	mV	
1000 psi (68.9 bar; 6,895 KPa)	125	150	175	mV	

### DIMENSIONS (millimeters, post-cut)

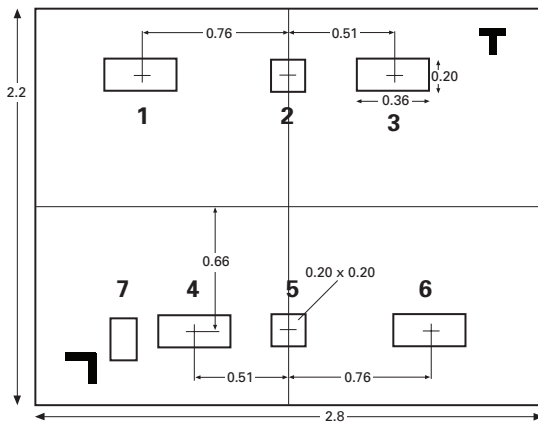

Standard Bond Pad Metallization = Aluminum

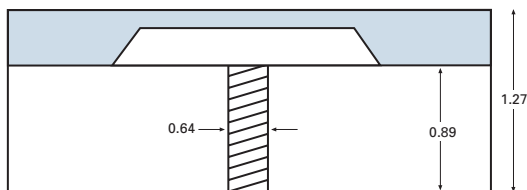

Absolute also; other constraints available

### ELECTRICAL

