

TFT-DISPLAY DATASHEET

ONation
Model:OT080FSDDDV-H0

BRIEF SPEC.:

Main Feature	LandscapeType Transmissive
Active Screen Area	162 x 121.5 (mm)
Diagonal Format	8 " 4:3
Resolution	800 X 600
Colors	(8 Bit)
Backlight	LED White
Brightness	1000 cd/m ²
LED Life Time	20K (h)
Interface	TTL
Viewing Angle	70/70 L/R 50/70 up/down
Touchscreen	no
Power Supply	3.3 V (Typ.)
Module Outline	183.0 x 141.0x 10.3(mm)
Operation Temperature	-20... +70 °C
Storage Temperature	-30... +80 °C
Surface Treatment	Anti-glare



ONation Corporation

TFT COLOR LCD MODULE

MODEL: OT080FSDDDV-H0
(Complied with RoHS)

SVGA
TTL Interface

Version: P0.1

Customer : _____
Approved By : _____
Date: _____

ONATION		
APPROVAL	CHECKER	PREPARE
<i>Jan</i>	<i>Josh</i>	<i>Jan</i>

All information is subject to change without notice.
Please confirm the sales representative before starting to design your system

CONTENTS


NO.	ITEM	PAGE
1	RECORD OF REVISION	0-1
2	MECHANICAL SPECIFICATIONS	1
3	OUTLINE DIMENSIONS	2
4	INTERFACE PIN CONNECTION	3
5	BLOCK DIAGRAM	4
6	ABSOLUTE MAXIMUM RATINGS	5
7	ELECTRICAL CHARACTERISTICS	6
8	OPTICAL CHARACTERISTICS	7~9
9	TIMING SPECIFICATIONS	10~12
10	RELIABILITY TEST	13
11	LCM INSPECTION STANDARD	14
12	PACKAGE INFORMATION	14
13	PRECAUTIONS FOR USE	15

2.MECHANICAL SPECIFICATIONS

(1)	Number Of Dots (Dots)	800(R.G.B) X 600
(2)	Module Size(mm)	183.0(W) X 141.0(H) X 10.3(D) (**)
(3)	Active Area(mm)	162(H) X 121.5(V)
(4)	Pixel Pitch(mm)	0.2025 (H) X 0.2025(V)
(5)	LCD / Polarizer Model	TFT , Transmissive, Normally/White,Anti-glare
(6)	Backlight Color	White,LED
(7)	Viewing Direction	6 O'clock Horizontal : Right side 70°(typ.), Left side 70°(typ.) Vertical : Up side 50°(typ.), Down side 70°(typ.)
(8)	Electrical Interface	TTL Interface
(9)	Color Configuration	R.G.B Stripe
(10)	Module Weight(g)	(TBD)

(**)Module include PCB and component.

3. OUTLINE DIMENSIONS

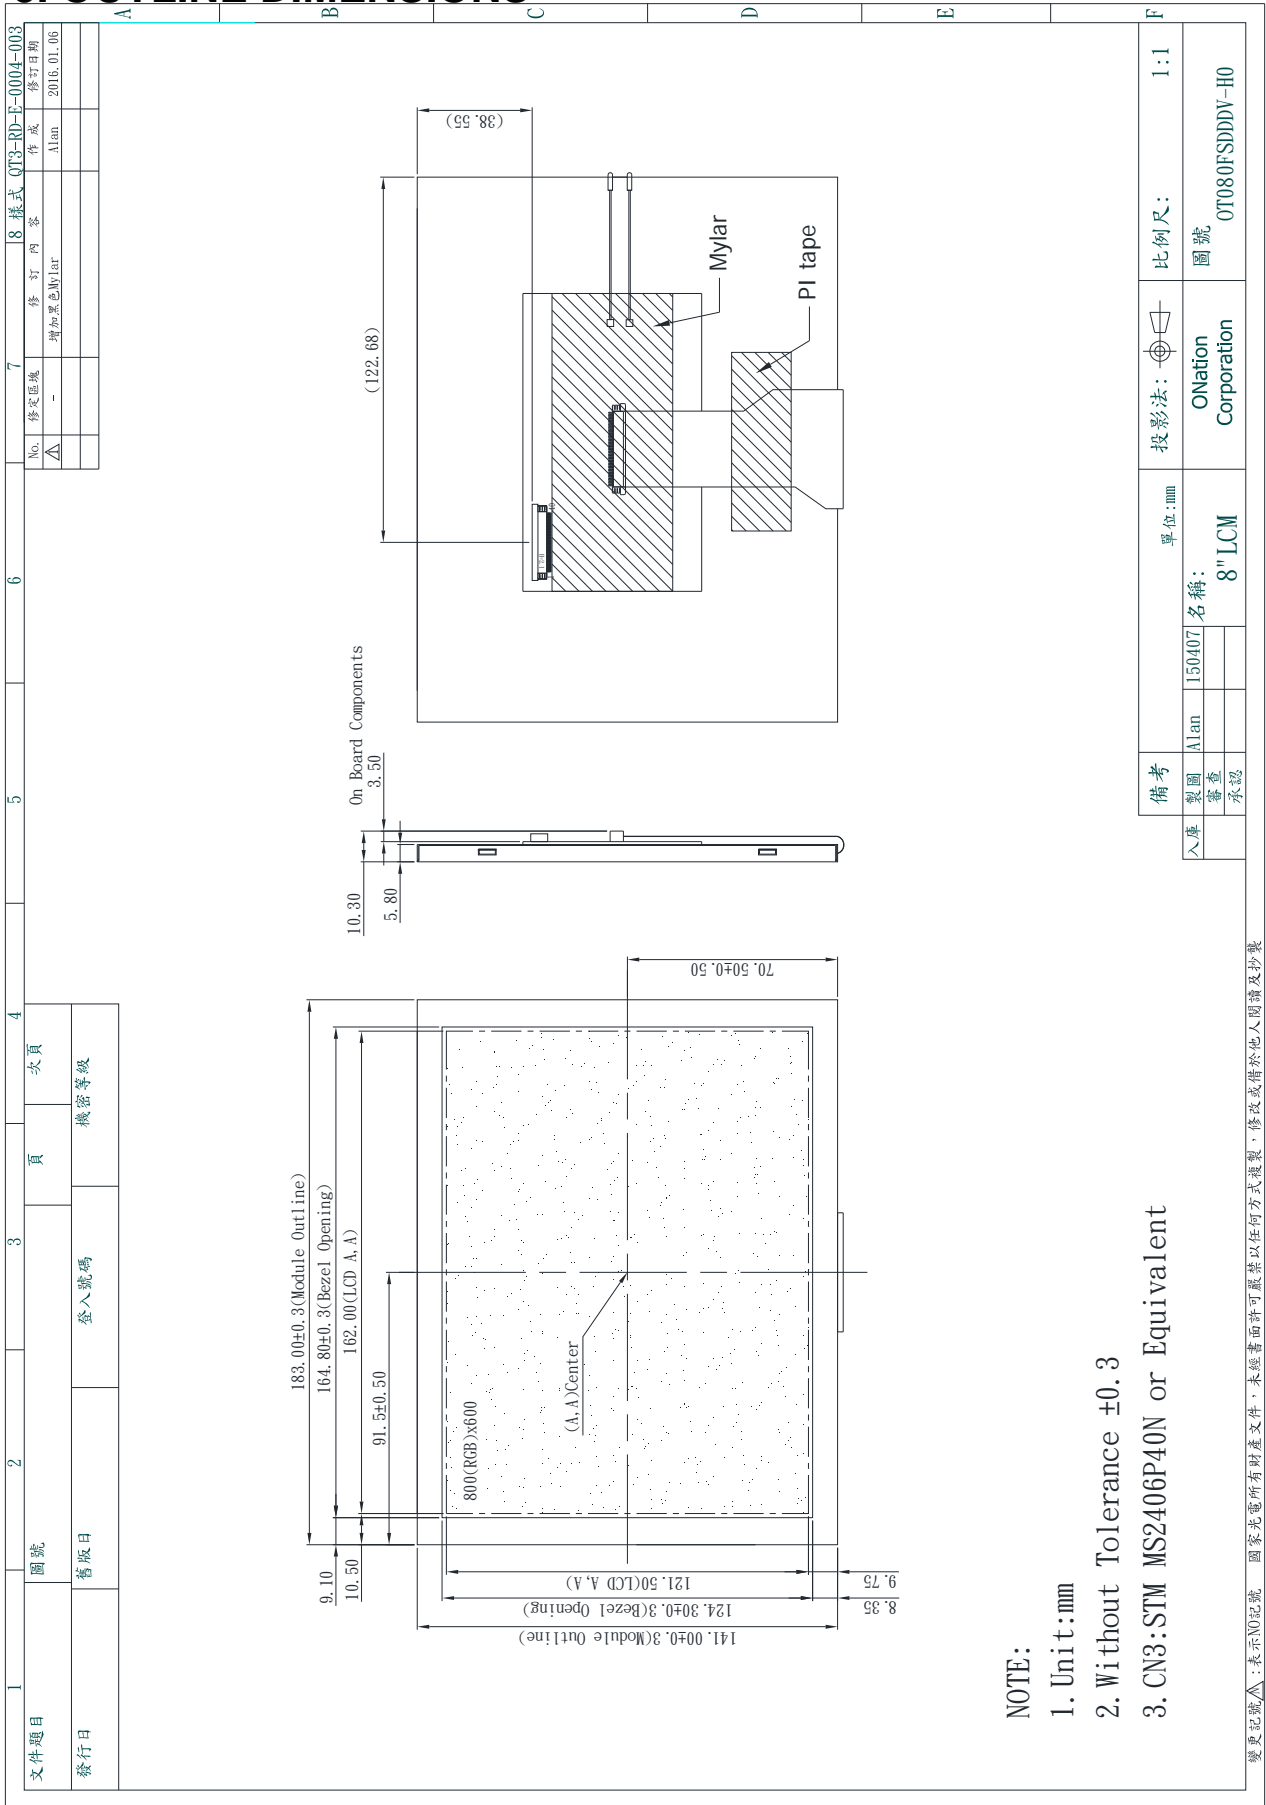

NOTE:
 1. Unit:mm
 2. Without Tolerance ±0.3
 3. CN3:STM MS2406P40N or Equivalent

備考	單位:mm	投影法:	比例尺:
入庫	製圖 Alan	ONation Corporation	1:1
審查	審核 150407	圖號	OT080FSDDV-H0
承認	名稱: 8" LCM		

變更記號△:表示N0記號 國家光電所有財產文件,未經書面許可嚴禁以任何方式複製、修改或借於他人閱讀及抄襲


4. INTERFACE PIN CONNECTION

4.1 LCM PANEL DRIVING SECTION

CN1 Connector: STM MS2406P40N or Equivalent

PIN NO.	SIGNAL	FUNCTION
1	GND	GROUND
2	ADJ	ADJUST THE BACK LIGHT BRIGHTNESS
3	VLED	POWER SUPPLY FOR LED DRIVER CIRCUIT
4	VLED	POWER SUPPLY FOR LED DRIVER CIRCUIT
5	VCC	POWER SUPPLY FOR DIGITAL CIRCUIT
6	VCC	POWER SUPPLY FOR DIGITAL CIRCUIT
7	DE	DATA ENABLE
8	GND	GROUND
9	B7	BLUE DATA SIGNAL(MSB)
10	B6	BLUE DATA SIGNAL
11	B5	BLUE DATA SIGNAL
12	B4	BLUE DATA SIGNAL
13	GND	GROUND
14	B3	BLUE DATA SIGNAL
15	B2	BLUE DATA SIGNAL
16	B1	BLUE DATA SIGNAL
17	B0	BLUE DATA SIGNAL(LSB)
18	GND	GROUND
19	G7	GREEN DATA SIGNAL(MSB)
20	G6	GREEN DATA SIGNAL
21	G5	GREEN DATA SIGNAL
22	G4	GREEN DATA SIGNAL
23	GND	GROUND
24	G3	GREEN DATA SIGNAL
25	G2	GREEN DATA SIGNAL
26	G1	GREEN DATA SIGNAL
27	G0	GREEN DATA SIGNAL(LSB)
28	GND	GROUND
29	R7	RED DATA SIGNAL(MSB)
30	R6	RED DATA SIGNAL
31	R5	RED DATA SIGNAL
32	R4	RED DATA SIGNAL
33	GND	GROUND
34	R3	RED DATA SIGNAL
35	R2	RED DATA SIGNAL
36	R1	RED DATA SIGNAL
37	R0	RED DATA SIGNAL(LSB)
38	GND	GROUND
39	DCLK	CLOCK SIGNALS
40	GND	GROUND

5. BLOCK DIAGRAM

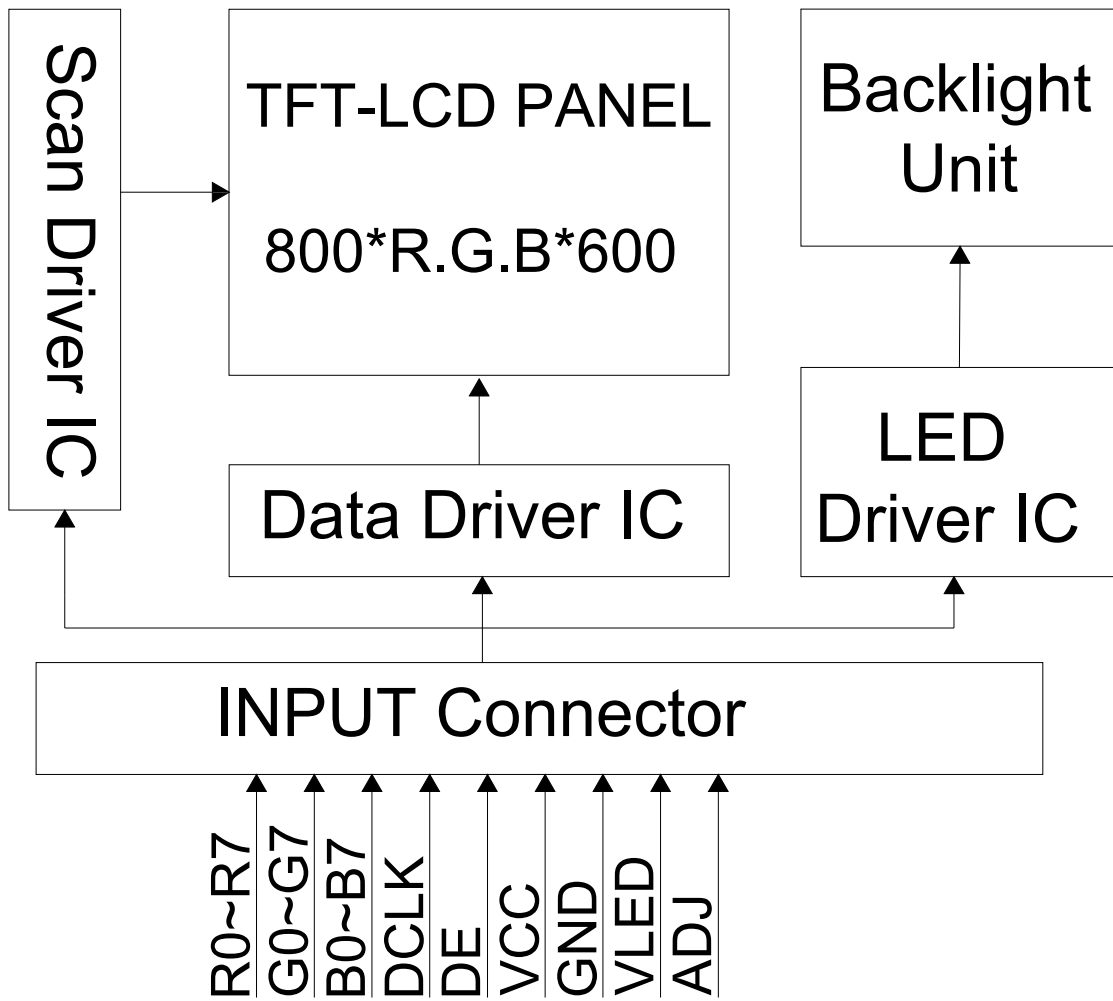

6.ABSOLUTE MAXIMUM RATINGS

6.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	MIN.	MAX.	UNIT	REMARK
Digital Supply Voltage	VCC	-0.3	+5.0	V	
Logic Input Voltage	V _{IN}	-0.3	VCC+0.3	V	
Logic Output Voltage	V _{OUT}	-0.3	VCC+0.3	V	

Note: The absolute maximum rating values of this product not allowed to be exceeded at any times. Should be module be used with any of absolute maximum ratings exceeded. The characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

6.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	OPERATING		STORAGE		REMARK
	MIN.	MAX.	MIN.	MAX.	
Ambient Temperature(°C)	-20	(70)	-30	80	Note 1,2,3
Humidity(% RH)	-	90	-	90	Note 4

Note 1 : The response time will become lower when operated at low temperature.

Note 2 : Background color changes slightly depending on ambient temperature.

Note 3 : Operation Ta=(70)°C & -20°C ≤ 240Hrs.

Note 4 : Storage Ta=40°C & RH=90% ≤ 240Hrs.

7. ELECTRICAL CHARACTERISTICS

7.1 ELECTRICAL CHARACTERISTICS OF LCD

Ta=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Power Voltage For LCD	VCC	3.0	3.3	3.6	V
	ICC	-	200	250	mA
Input Logic High Voltage	V _{IH}	0.7VCC	-	VCC	V
Input Logic Low Voltage	V _{IL}	0	-	0.3VCC	V

Note : Test condition : VCC=3.3V ; Test Pattern : Black

7.2 BACKLIGHT UNITS

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
LED Driving Voltage	VLED	8.0	12.0	15.0	V
	I _{LED} (VLED=5V)	-	TBD	TBD	A
ADJ Input Voltage	V _{IH}	0.7 VCC	-	1.4VCC	V
	V _{IL}	0	-	0.3 VCC	
ADJ Frequency	-	100	-	1000	HZ
LED life time	-	-	20K	-	Hr

Note 1: The LED of B/L is drive by current only, drive voltage is for reference only. drive voltage can make driving current under safety area(current between minimum and maximum). 20,000 hours is only an estimate for reference.

Note 2: The lifetime of LED is defined as the time when it continues to operate under the conditions at Ta= 25 ±2°C and PWM=100% (LED forward current) until the brightness becomes ≤50% of its original value.

8.OPTICAL CHARACTERISTICS

Ta=25°C

ITEM	SYMBOL	CONDITIONS	SPECIFICATIONS				REMARK
			MIN.	TYP.	MAX.	UNIT	
Contrast Ratio	CR	Viewing Normal Angle $\Theta_x=\Theta_y=0^\circ$	400	500	-	-	Note (1)
Response Time	TR		-	10	20	ms	Note (2)
	TF		-	15	30	ms	
Chromaticity	White	XW	(0.26)	(0.31)	(0.36)	-	Note (4)
		YW	(0.28)	(0.33)	(0.38)	-	
Viewing Angle	Hor.	Θ_{x+}	60	70	-	Deg.	Note (3)
		Θ_{x-}	60	70	-		
	Ver.	Θ_{y+}	40	50	-		
		Θ_{y-}	60	70	-		
NTSC	-	-	-	50	-	%	
Luminance	L	PWM=100%	800	1000	-	cd/m ²	
Luminance Uniformity	YU		70	75	-	%	Note (5)

Note 1 : Definition of Contrast Ratio (CR) :

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{63}/L_0$$


L63 : Luminance of gray level 63

L0 : Luminance of gray level 0


$$CR = CR(5)$$

CR(X) is corresponding to the Contrast Ratio of the point X at Figure in Note 5

Note 2 : Definition of Response Time (TR.TF)

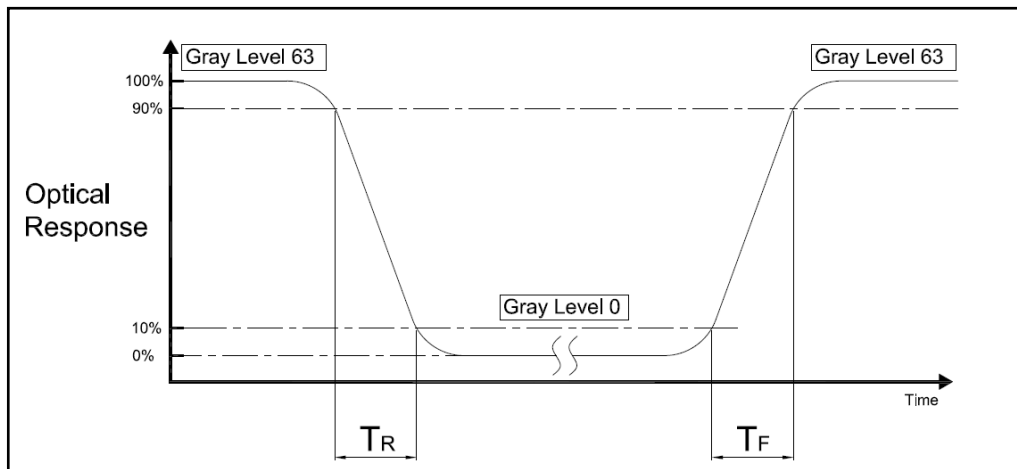


Note 3 : Definition of Viewing Angle

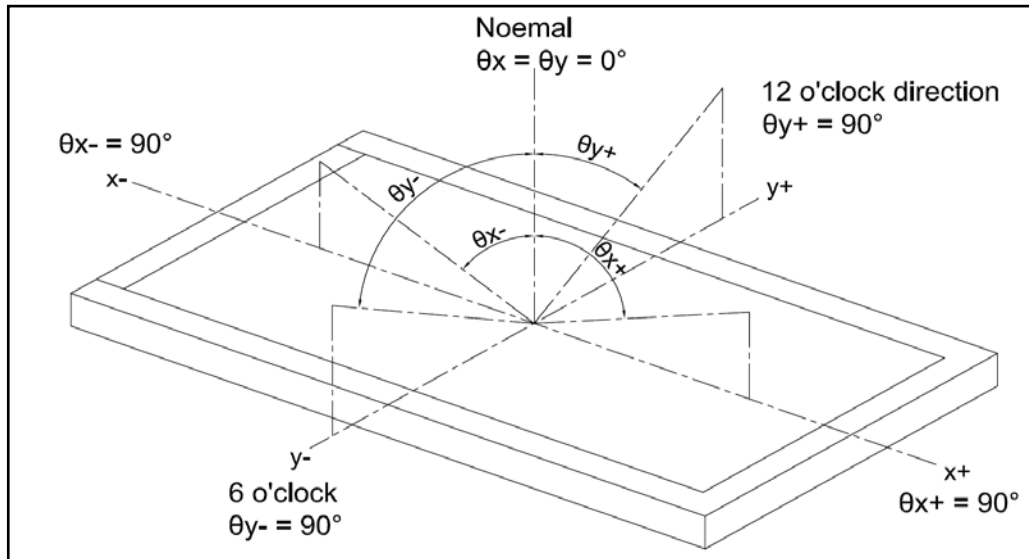


Note 4 : Measurement Set-Up:

The LCD module should be stabilized at a given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

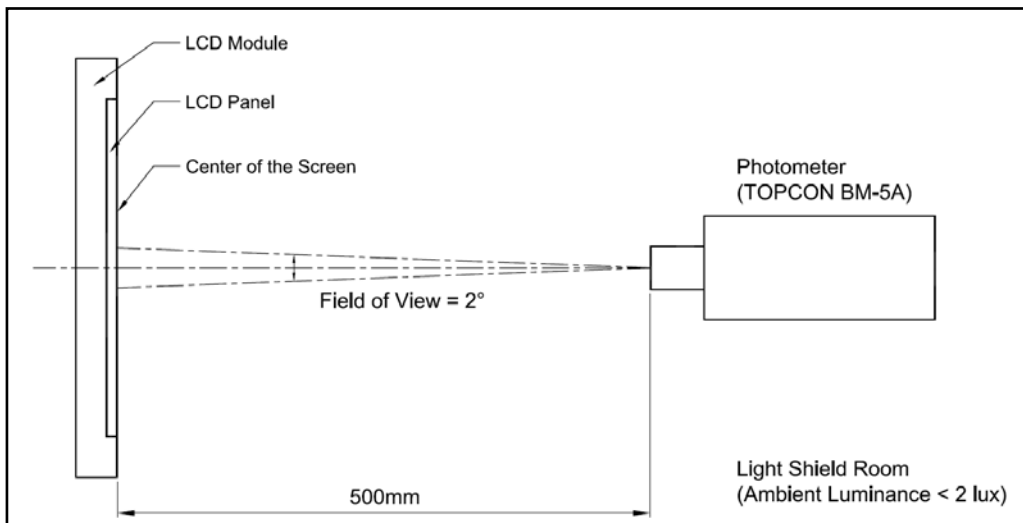


Note 5 :

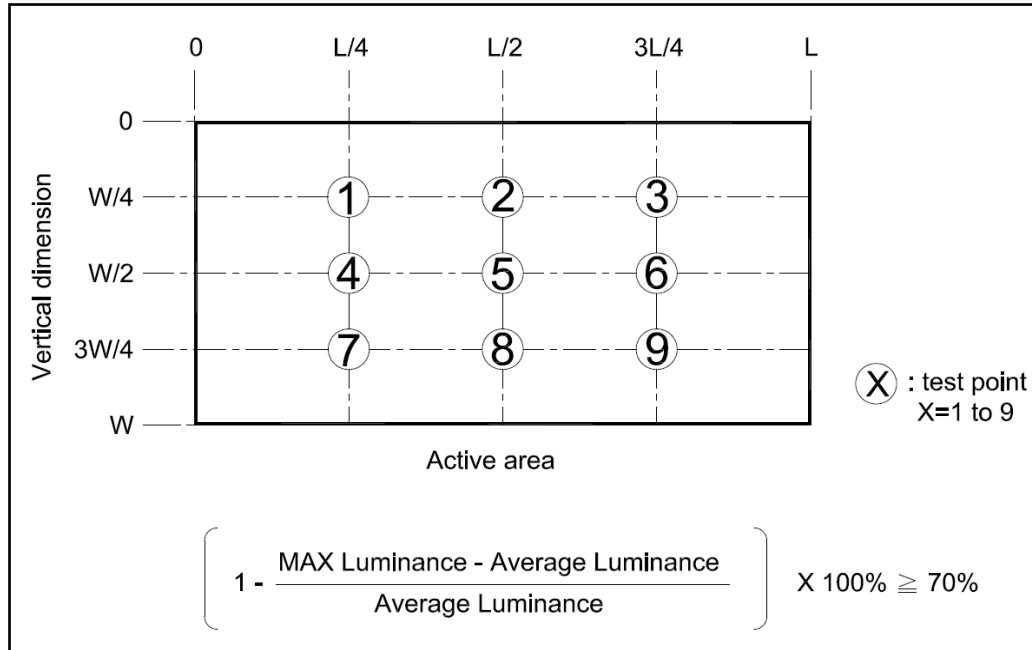

9. TIMING SPECIFICATIONS

9.1 POWER SIGNAL SEQUENCE


Power Signal sequence:
 $t1 \leq 10ms$; $1 \text{ sec} \leq t5$
 $200ms \leq t2$; $200ms \leq t6$
 $0 < t3 \leq 50ms$; $200ms \leq t7$
 $0 < t4 \leq 10ms$

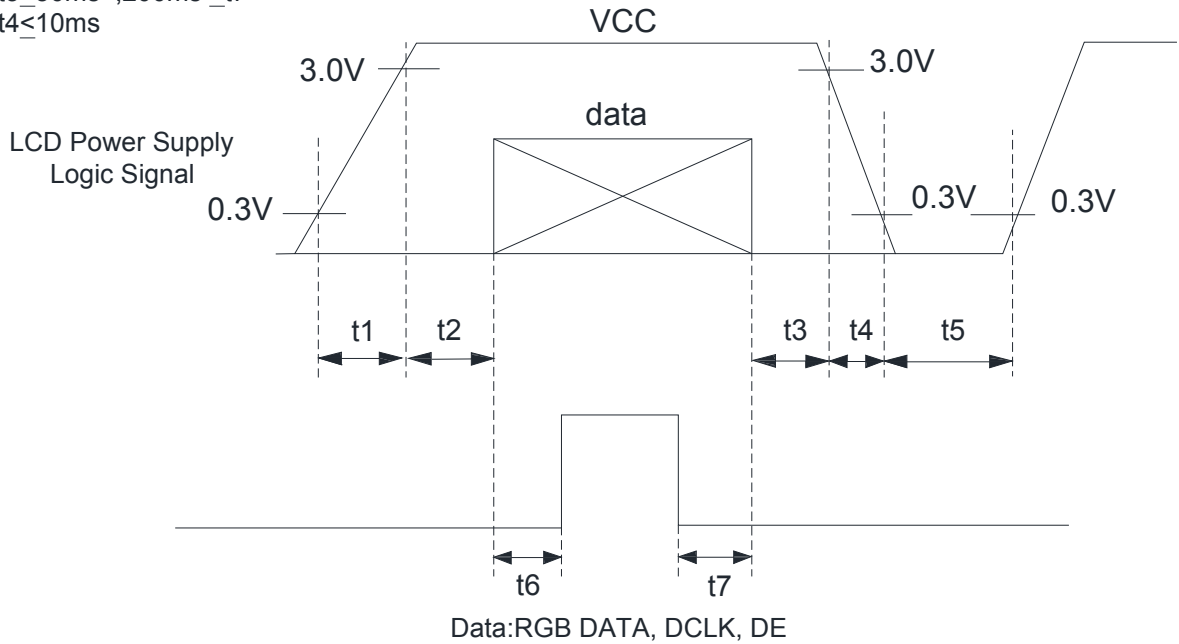

9.2 TIMING CHARACTERISTICS

PARAMETER	SYMBOL	SPECIFICATIONS			UNIT
		MIN.	TYP.	MAX.	
Horizontal Display Area	thd	-	800	-	CLK
CLK Frequency	fclk	-	40	50	MHz
One Horizontal Line	th	862	1056	1200	CLK
HS Back Porch	thb	46			CLK
HS Front Porch	thfp	16	210	354	CLK


9.3 TIMING CHARACTERISTICS DIAGRAMS

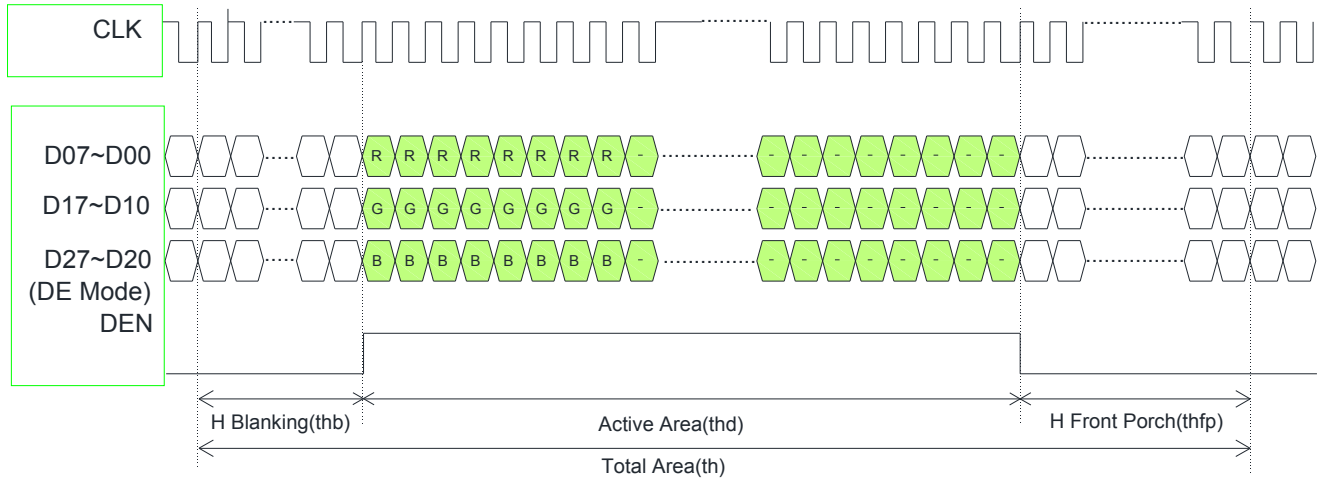

9.4 AC TIMING CHARACTERISTICS

(VCC=3.0 to 3.6V, GND=0V, Ta=-20 to +70°C)

ITEM	SYMBOL	SPECIFICATIONS			UNIT	REMARK
		MIN.	TYP.	MAX.		
HS setup time	Thst	8	-	-	Ns	
HS hold time	Thhd	8	-	-	Ns	
VS setup time	Tvst	8	-	-	Ns	
VS hold time	Tvhd	8	-	-	Ns	
Data setup time	Tdsu	8	-	-	Ns	
Data hold time	Tdhd	8	-	-	Ns	
DE setup time	Tesu	8	-	-	Ns	
DE hold time	Tehd	8	-	-	Ns	
VDD Power On Slew rate	TPOR	-	-	20	ms	
RSTB pulse width	TRst	10	-	-	us	
CLKIN cycle time	Tcoh	20	-	-	Ns	
CLKIN pulse duty	Tcwh	40	50	60	%	
Output stable time	Tsst	-	-	6	us	

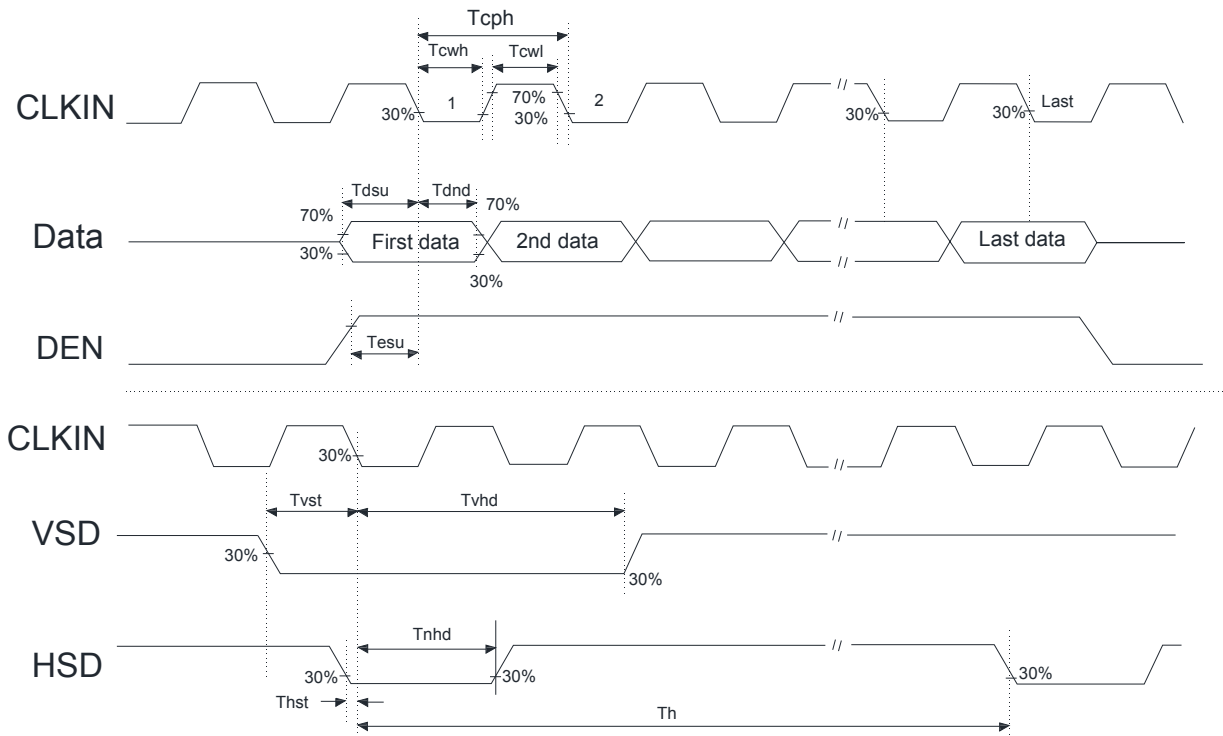

10. RELIABILITY TEST

ENVIRONMENTAL TEST				
NO.	ITEM	CONDITIONS	TIME PERIOD	REMARK
1	High Temperature Storage	80°C	240HRS	
2	Low Temperature Storage	-30±3°C	240HRS	
3	High Temperature Operation	(70)°C	240HRS	
4	Low Temperature Operation	-20°C	240HRS	
5	Temperature Cycle	-20°C ← 25°C → 70°C (30min) (5min) (30min)	100CYCLE	
6	High Temperature Humidity Storage	40°C 90%RH	240HRS	

NOTE (1): a. THE MODULE SHOULD WORK PROPERLY.

b. BEFORE AND AFTER FUNCTION TEST, THE DIFFERENCE OF CONSUMPTIVE CURRENT SHOULD BE WITHIN 10%

NOTE (2) : a. THE MODULE SHOULD WORK PROPERLY.

b. THE MODLUE WON'T BE DEFORMATIVE, COLOR CHANGEABLE OR BROKEN.

c. THE MODULES CAN'T BE APART.

11. LCM INSPECTION STANDARD

Inspection specifications refer ONation Corporation LCM INSPECTION STANDARD Document.
Document Number : TBD

12. PACKAGE INFORMATION

LCM MODEL	LCM QTY. IN THE BOX	INNER BOX SIZE (mm)	WEIGHT	REMARK
OT080FSDDDV-H0	TBD	TBD	TBD	

13. PRECAUTIONS FOR USE

13.1 SAFETY

- (1) Do not swallow any liquid crystal, even if there is no proof that liquid crystal is poisonous.
- (2) If the LCD panel breaks, be careful not to get liquid crystal to touch your skin.
- (3) If skin is exposed to liquid crystal, wash the area thoroughly with alcohol or soap.

13.2 STORAGE CONDITIONS

- (1) Store the panel or module in a dark place where the temperature is $23\pm 5^{\circ}\text{C}$ and the humidity is below $50\pm 20\% \text{RH}$.
- (2) Store in anti-static electricity container.
- (3) Store in clean environment, free from dust, active gas, and solvent.
- (4) Do not place the module near organics solvents or corrosive gases.
- (5) Do not crush, shake, or jolt the module.

13.3 HANDLING PRECAUTIONS

- (1) Avoid static electricity which can damage the CMOS LSI.
- (2) The polarizing plate of the display is very fragile. So, please handle it very carefully.
- (3) Do not give external shock.
- (4) Do not apply excessive force on the surface.
- (5) Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the Surface of plate.
- (6) Do not use ketonics solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent.
- (7) Do not operate it above the absolute maximum rating.
- (8) Do not remove the panel or frame from the module.
- (9) When the module is assembled, it should be attached to the system firmly, Be careful not to twist and bend the module.
- (10) Wipe off water droplets or oil immediately . If you leave the droplets for a long time, staining and discoloration may occur.
- (11) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.

13.4 WARRANTY

- (1) Acceptance inspection period
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- (2) Applicable warrant period
The period is within 12 months since the date of shipping out under normal using and storage conditions.