



SD53 Series Low Profile, Shielded Inductors

Description

- 125°C maximum total temperature operation
- Octagonal shape utilizes board space
- 5.2mm x 5.2mm x 3.0mm surface mount package
- Shielded drum core reduces EMI
- Ferrite core material
- Inductance range from 1.1uH to 100uH
- Current range from 4.08 Amps to 0.44 Amps


Applications

- High Power LED driver
- White LED and OLED displays
- DSL modems, digital cameras
- Buck, Boost Inductor
- Cellular phones, Smart phones
- MP3 players. Digital radio player
- PDA, Palmtop, and wireless handhelds
- Battery power, TFT LCD Bias supply

Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds maximum





Packaging

Supplied in tape and reel packaging, 2600 per reel



Inselkammerstraße 10 D-82008 Unterhaching Tel.: +49 (0)89 614503 10 Fax: +49 (0)89 614503 20 Fax: +41 (0)52 647 42 01 E-Mail: power@hy-line.de E-Mail: power@hy-line.ch URL: www.hy-line.de

Gründenstrasse 10 CH-8247 Flurlingen Tel.: +41 (0)52 647 42 00 URL: www.hy-line.ch

Part Number	Rated	OCL (1)	Part	Irms (2)	Isat (3)	DCR	DCR	K-factor
	Inductance	$\mu H \pm 20\%$	Marking	Amperes	Amperes	Ω @20°C	Ω @20°C	(4)
	(µH)					(Typical)	(Maximum)	
SD53-1R1-R	1.10	1.10	А	3.25	4.80	0.017	0.020	48
SD53-2R0-R	2.00	2.00	В	2.64	3.30	0.023	0.027	35
SD53-3R3-R	3.30	3.30	С	2.26	2.60	0.029	0.034	28
SD53-4R7-R	4.70	4.70	D	2.01	2.10	0.039	0.045	21
SD53-6R8-R	6.80	6.80	E	1.65	1.85	0.059	0.068	20
SD53-100-R	10.0	10.0	F	1.41	1.40	0.077	0.090	15
SD53-150-R	15.0	15.0	G	1.10	1.10	0.122	0.142	12
SD53-220-R	22.0	22.0	Н	0.81	0.94	0.179	0.208	10
SD53-330-R	33.0	33.0	I	0.75	0.76	0.221	0.257	8
SD53-470-R	47.0	47.0	J	0.64	0.64	0.303	0.352	7
SD53-680-R	68.0	68.0	K	0.52	0.58	0.452	0.525	6
SD53-101-R	100	100	Ĺ	0.44	0.45	0.689	0.801	5


- (1) Open Circuit Inductance Test Parameters: 100kHz, 0.1V, 0.0Adc.
- (2) Irms: DC current for an approximate ΔT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.
- (3) Isat Amperes peak for approximately 30% rolloff (@25°C)


- (4) K-factor: Used to determine B p-p for core loss (see graph). B p-p = $K^*L^*\Delta I$, B p-p(mT), K: (K factor from table), L: (Inductance in uH),
- ΔI (Peak to peak ripple current in Amps). Part Number Definition: SD53-xxx-R

SD53 = Product code and size; -xxx = Inductance value in uH; R = decimal point; If no R is present, third character = # of zeros.

-R suffix = RoHS compliant

Mechanical Diagrams





2 plcs


RECOMMENDED PCB LAYOUT

Dimensions are in millimeters






Packaging Information

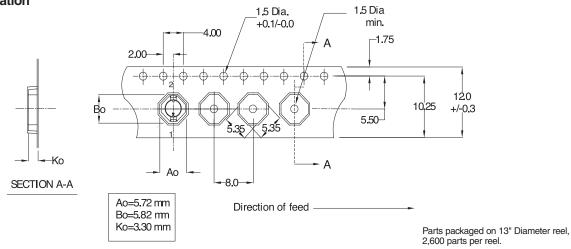


Core Loss

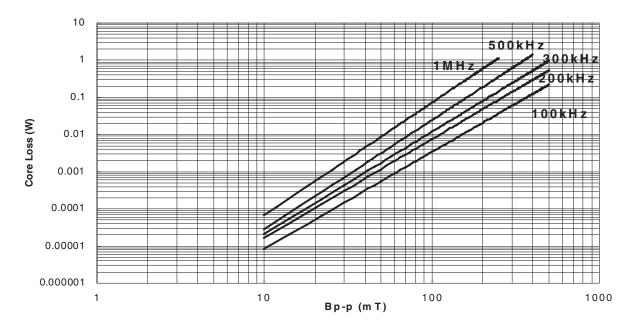




Temperature Rise vs. Loss

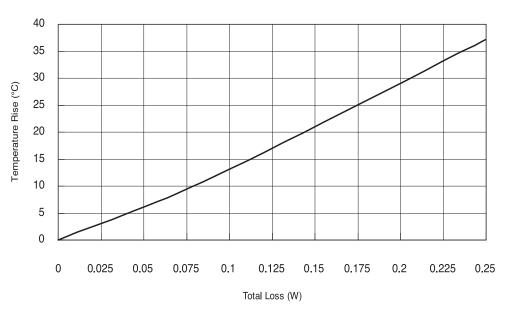

Inductance Characteristics

OCL vs. Isat

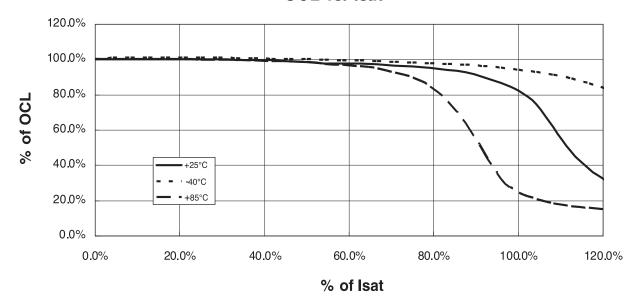



PM-4149 3/07

Visit us on the Web at www.cooperbussmann.com

© Cooper Electronic Technologies 2007 1225 Broken Sound Pkwy. Suite F Boca Raton, FL 33487 Tel: +1-561-998-4100 Toll Free: +1-888-414-2645 Fax: +1-561-241-6640

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.